


CARTRIDGE

22-250 Remington - 34/35 grain

Version 8.0

Nosler®

UP FRONT

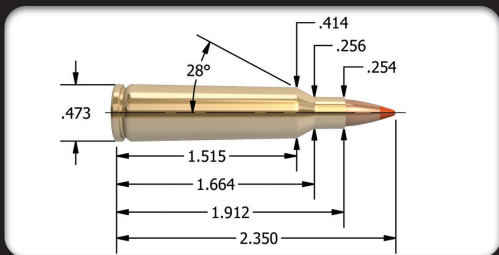

22-250 Remington - 34/35 grain

22 Cal. (.224")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.350"

TESTED O.A.C.L.

B.C.

S.D.

Nosler®	34gr. FBHP	2.350"	0.113	0.097
Ballistic Tip® Lead Free	35gr. Spitzer	2.350"	0.201	0.100
CASE TYPE:	Nosler	PRIMER TYPE	WLR	
CASE HOLDS:	40.9 Gr. WATER	BARREL Length/Make	24" Lilja	
		BARREL Twist	1-14"	

POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.		LOAD DENSITY (VOLUME)
RL15	39.0 MAX.	4344			99%
	37.0	4112			94%
	35.0 *	3820			89%
H335	38.0 MAX.	4397			94%
	36.0	4212			89%
	34.0 *	3992			84%
A-2520	39.0 MAX.	4405			98%
	37.0	4224			93%
	35.0 *	4021			88%
IMR 4320	40.0 MAX.	4430		**	105%
	38.0	4238			100%
	36.0 *	3950			95%
Varget	40.0 MAX.	4458		**	106%
	38.0	4294			100%
	36.0 *	4105			95%
W748 Most Accurate Powder Tested	40.0 MAX.	4466		**	102%
	38.0	4277			97%
	36.0 *	4116			92%
IMR 4064	38.0 * MAX.	4480		**	102%
	36.0	4321			97%
	34.0	3957			91%
IMR 4895	39.0 MAX.	4492		**	105%
	37.0 *	4252			99%
	35.0	4019			94%
TAC	38.5 MAX.	4545			96%
	36.5	4406			91%
	34.5 *	4277			86%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load