


CARTRIDGE

22-250 Remington - 40 grain

Version 8.0

Nosler®

UP FRONT

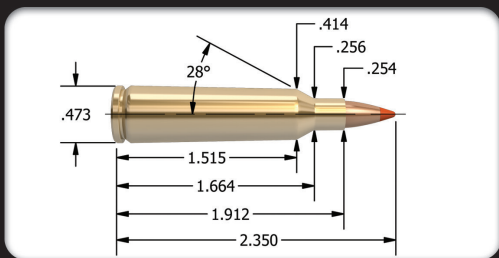

22-250 Remington - 40 grain

22 Cal. (.224")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.350"

TESTED O.A.C.L.

B.C.

S.D.

Ballistic Tip®	40gr. Spitzer	2.350"	0.221	0.114
Varmageddon®	40gr. FBHP	2.280"	0.158	0.114
Varmageddon®	40gr. FB Tipped	2.350"	0.211	0.114
CASE TYPE:	Nosler	PRIMER TYPE	WLR	
CASE HOLDS:	43.0 Gr. WATER	BARREL Length/Make	24" Lilja	
		BARREL Twist	1-14"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4895	36.0 * MAX.	3961	92%
	34.0	3678	87%
	32.0	3395	82%
RL15	37.0 * MAX.	3990	90%
	35.0	3711	85%
	33.0	3431	80%
W760	41.0 * MAX.	3997	100%
	39.0	3750	95%
	37.0	3503	90%
Viht N140	37.5 MAX.	4006	** 101%
	35.5	3763	96%
	33.5 *	3519	91%
A-2460	35.5 MAX.	4050	83%
	33.5	3833	79%
	31.5 *	3616	74%
H380	41.0 * MAX.	4070	100%
	39.0	3776	95%
	37.0	3482	91%
Varmint	39.0 * MAX.	4089	92%
	37.0	3880	87%
	35.0	3694	82%
Varget	38.0 MAX.	4100	96%
	36.0	3863	91%
	34.0 *	3625	85%
TAC Most Accurate Powder Tested	37.5 MAX.	4181	89%
	35.5	3942	84%
	33.5 *	3723	79%
CFE 223	42.5 MAX.	4325	100%
	40.5	4101	95%
	38.5 *	3896	90%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load