


# CARTRIDGE

22-250 Remington - 40 grain BTLF (Fast Twist)

Version 8.0

# Nosler®

UP FRONT

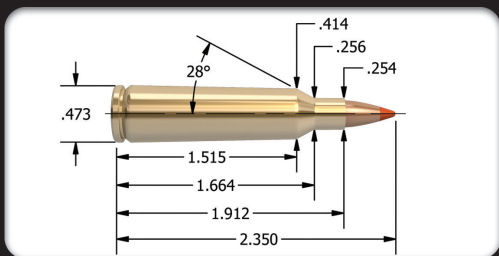

## 22-250 Remington - 40 grain (Fast Twist) 22 Cal. (.224")

**MAXIMUM S.A.A.M.I. O.A.C.L. 2.350"**

**TESTED O.A.C.L.**

**B.C. S.D.**

Ballistic Tip® Lead Free	40gr. Spitzer	2.350"	0.220	0.114
CASE TYPE:	Nosler	PRIMER TYPE	WLR	
CASE HOLDS:	43.0 Gr. WATER	BARREL Length/Make	24" Wiseman	
		BARREL Twist	1-8"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>RL15</b>	38.0 MAX.	4112	92%
	36.0	3897	87%
	34.0 *	3677	82%
<b>IMR 4320</b>	36.0 MAX.	4121	90%
	34.0 *	3893	85%
	32.0	3668	80%
<b>W748</b>	38.0 MAX.	4196	92%
	36.0	3999	87%
	34.0 *	3718	82%
<b>IMR 4895</b> Most Accurate Powder Tested	37.5 MAX.	4211	96%
	35.5 *	3960	91%
	33.5	3724	86%
<b>Viht N140</b>	37.5 * MAX.	4224	** 101%
	35.5	4006	96%
	33.5	3796	91%
<b>Viht N135</b>	35.5 MAX.	4248	96%
	33.5	4014	91%
	31.5 *	3764	85%
<b>Varget</b>	38.5 MAX.	4252	97%
	36.5	4079	92%
	34.5 *	3856	87%
<b>A-2460</b>	36.5 MAX.	4287	86%
	34.5	4073	81%
	32.5 *	3911	76%
<b>TAC</b>	37.5 MAX.	4300	89%
	35.5 *	4179	84%
	33.5	4045	79%
<b>RL10x</b>	34.5 MAX.	4334	90%
	32.5 *	4128	85%
	30.5	3898	80%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load