


CARTRIDGE

22 Nosler - 40 grain

Version 8.1

Nosler

UP FRONT

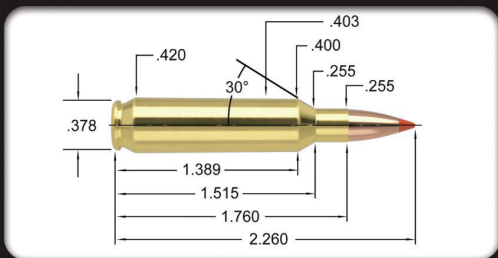

22 Nosler - 40 grain

22 Cal. (.224")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.260"

TESTED O.A.C.L.

B.C.

S.D.

Ballistic Tip®	40gr. Spitzer	2.260"	0.221	0.114
Ballistic Tip® Lead Free	40gr. Spitzer	2.260"	0.220	0.114
Varmageddon®	40gr. FBHP	2.180"	0.158	0.114
Varmageddon®	40gr. FB Tipped	2.225"	0.211	0.114

CASE TYPE:	Nosler	PRIMER TYPE	WSR
CASE HOLDS:	35.9 Gr. WATER	BARREL Length/Make	24" H-S Prec.
		BARREL Twist	1-8"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
RL7	26.5 * MAX.	3730	80%
	25.5	3650	77%
	24.5	3570	74%
RL10x	28.0 * MAX.	3738	88%
	27.0	3618	85%
	26.0	3498	81%
A-2015	29.5 * MAX.	3780	93%
	28.5	3601	90%
	27.5	3422	87%
H322 Most Accurate Powder Tested	30.5 * MAX.	3841	92%
	29.5	3698	89%
	28.5	3555	86%
H4198	27.5 MAX.	3853	86%
	26.5 *	3716	83%
	25.5	3579	80%
Benchmark	31.5 * MAX.	3889	95%
	30.5	3745	92%
	29.5	3624	89%
H335	32.5 MAX.	3909	92%
	31.5 *	3727	89%
	30.5	3545	86%
TAC	33.0 * MAX.	3913	94%
	32.0	3806	91%
	31.0	3699	88%
A-2520	33.0 * MAX.	3914	95%
	32.0	3788	92%
	31.0	3662	89%
H4895	32.0 MAX.	3917	98%
	31.0 *	3802	95%
	30.0	3580	92%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load