


CARTRIDGE

22 Nosler - 55 grain

Version 8.1

Nosler®

UP FRONT

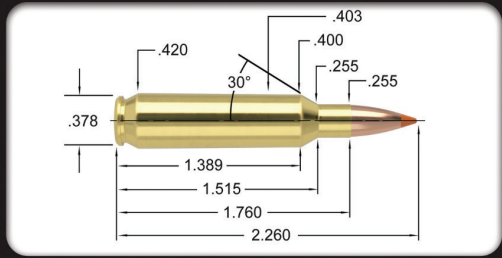

22 Nosler - 55 grain

22 Cal. (.224")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.260"

TESTED O.A.C.L.

B.C.

S.D.

Ballistic Tip®	55gr. Spitzer	2.260"	0.267	0.157
CT® Ballistic Silvertip®	55gr. Spitzer	2.260"	0.267	0.157
Nosler®	55gr. FBHP	2.260"	0.210	0.157
Nosler®	55gr. FBSP	2.260"	0.218	0.157
Varmageddon®	55gr. FBHP	2.260"	0.210	0.157
Varmageddon®	55gr. FB Tipped	2.260"	0.255	0.157

CASE TYPE:	Nosler	PRIMER TYPE	WSR
CASE HOLDS:	34.7	Gr. WATER	BARREL Length/Make
		BARREL Twist	24" H-S Prec.
			1-8"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4166	28.5 * MAX.	3290	90%
	27.5	3212	87%
	26.5	3118	84%
A-2015	27.0 * MAX.	3292	88%
	26.0	3194	85%
	25.0	3101	82%
Benchmark	28.5 * MAX.	3378	89%
	27.5	3304	86%
	26.5	3230	83%
Norma 202	30.0 MAX.	3395	98%
	29.0 *	3290	95%
	28.0	3186	92%
TAC	29.5 * MAX.	3402	87%
	28.5	3310	84%
	27.5	3219	81%
Varget Most Accurate Powder Tested	30.0 MAX.	3406	93%
	29.0 *	3249	90%
	28.0	3092	87%
RL15	31.5 MAX.	3437	95%
	30.5 *	3314	92%
	29.5	3191	89%
H335	30.5 MAX.	3438	89%
	29.5 *	3300	86%
	28.5	3169	83%
A-2520	30.5 * MAX.	3444	91%
	29.5	3345	88%
	28.5	3246	85%
CFE 223	33.0 * MAX.	3518	96%
	32.0	3431	93%
	31.0	3344	90%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load