


CARTRIDGE

22 Nosler - 64 grain

Version 8.1

Nosler[®]

UP FRONT

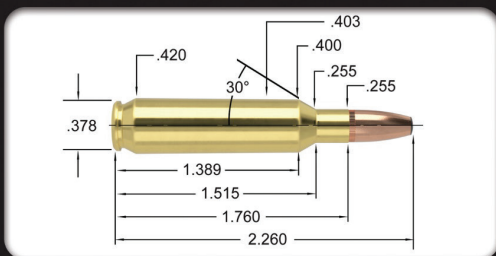

22 Nosler - 64 grain

22 Cal. (.224")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.260"

TESTED O.A.C.L.

B.C.

S.D.

Bonded Solid Base [®]	64gr PPT	2.175"	0.231	0.182
CASE TYPE:	Nosler	PRIMER TYPE	WSR	
CASE HOLDS:	33.2 Gr. WATER	BARREL Length/Make	24" H-S Prec.	
		BARREL Twist	1-8"	

POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
A-2015	25.0 * MAX.	2940	<div style="width: 86%;"></div>	86%
	24.0	2844	<div style="width: 82%;"></div>	82%
	23.0	2751	<div style="width: 79%;"></div>	79%
IMR 4166	27.0 * MAX.	3002	<div style="width: 89%;"></div>	89%
	26.0	2926	<div style="width: 86%;"></div>	86%
	25.0	2850	<div style="width: 83%;"></div>	83%
A-2495	27.0 MAX.	3024	<div style="width: 92%;"></div>	92%
	26.0 *	2914	<div style="width: 89%;"></div>	89%
	25.0	2804	<div style="width: 86%;"></div>	86%
Norma 202	27.0 * MAX.	3024	<div style="width: 92%;"></div>	92%
	26.0	2925	<div style="width: 89%;"></div>	89%
	25.0	2826	<div style="width: 86%;"></div>	86%
H335	26.5 MAX.	3038	<div style="width: 81%;"></div>	81%
	25.5 *	2920	<div style="width: 78%;"></div>	78%
	24.5	2802	<div style="width: 75%;"></div>	75%
Varget Most Accurate Powder Tested	27.0 MAX.	3048	<div style="width: 88%;"></div>	88%
	26.0 *	2941	<div style="width: 85%;"></div>	85%
	25.0	2834	<div style="width: 81%;"></div>	81%
A-2520	28.5 MAX.	3069	<div style="width: 88%;"></div>	88%
	27.5	3022	<div style="width: 85%;"></div>	85%
	26.5 *	2929	<div style="width: 82%;"></div>	82%
TAC	28.0 MAX.	3083	<div style="width: 86%;"></div>	86%
	27.0 *	2976	<div style="width: 83%;"></div>	83%
	26.0	2869	<div style="width: 80%;"></div>	80%
BL-C2	29.0 * MAX.	3085	<div style="width: 89%;"></div>	89%
	28.0	2983	<div style="width: 86%;"></div>	86%
	27.0	2881	<div style="width: 83%;"></div>	83%
RL15	29.0 * MAX.	3123	<div style="width: 91%;"></div>	91%
	28.0	3027	<div style="width: 88%;"></div>	88%
	27.0	2931	<div style="width: 85%;"></div>	85%
W748	29.5 MAX.	3125	<div style="width: 93%;"></div>	93%
	28.5	3019	<div style="width: 89%;"></div>	89%
	27.5 *	2913	<div style="width: 86%;"></div>	86%
CFE 223	30.0 * MAX.	3157	<div style="width: 91%;"></div>	91%
	29.0	3072	<div style="width: 88%;"></div>	88%
	28.0	2987	<div style="width: 85%;"></div>	85%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested
 ** = Compressed load