


CARTRIDGE

22 Nosler - 69/70 grain

Version 8.1

Nosler®

UP FRONT

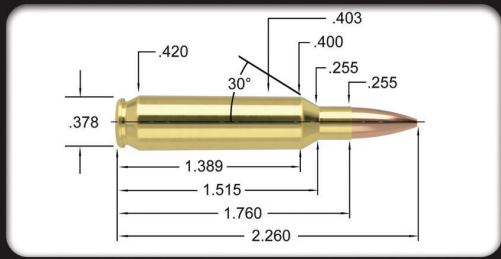

22 Nosler - 69/70 grain

22 Cal. (.224")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.260"

TESTED O.A.C.L.

B.C.

S.D.

Custom Competition®	69gr. HPBT	2.260"	0.305	0.196
RDF®	70gr. HPBT	2.260"	0.416	0.199
CASE TYPE:	Nosler	PRIMER TYPE	WSR	
CASE HOLDS:	33.3 Gr. WATER	BARREL Length/Make	24" H-S Prec.	
		BARREL Twist	1-8"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
A-2015	25.5 * MAX.	2924	87%
	24.5	2822	84%
	23.5	2720	80%
Norma 202	27.5 * MAX.	3000	94%
	26.5	2891	90%
	25.5	2782	87%
H335	27.0 * MAX.	3006	82%
	26.0	2912	79%
	25.0	2818	76%
W748	28.5 * MAX.	3045	89%
	27.5	2949	86%
	26.5	2853	83%
TAC	28.5 MAX.	3052	87%
	27.5 *	2938	84%
	26.5	2824	81%
Varget Most Accurate Powder Tested	28.0 * MAX.	3054	91%
	27.0	2948	88%
	26.0	2842	84%
W760	32.0 * MAX.	3071	** 101%
	31.0	2967	97%
	30.0	2879	94%
A-2520	28.5 * MAX.	3075	88%
	27.5	2958	85%
	26.5	2806	82%
CFE 223	30.0 * MAX.	3087	91%
	29.0	2982	88%
	28.0	2877	85%
RL15	29.0 * MAX.	3091	91%
	28.0	2990	88%
	27.0	2889	84%
H380	31.5 MAX.	3121	100%
	30.5 *	3019	96%
	29.5	2917	93%
BL-C2	30.5 * MAX.	3159	93%
	29.5	3027	90%
	28.5	2895	87%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

* = Most accurate load tested
 ** = Compressed load