


CARTRIDGE

22 Nosler - 77 grain

Version 8.1

Nosler®

UP FRONT

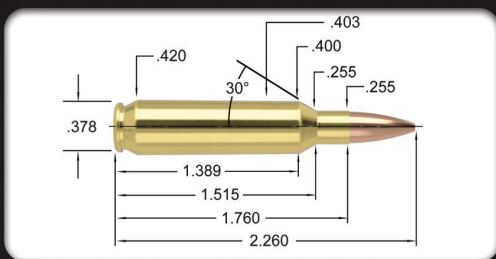

22 Nosler - 77 grain

22 Cal. (.224")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.260"

TESTED O.A.C.L.

B.C.

S.D.

Custom Competition®	77gr. HPBT	2.250"	0.340	0.219
CASE TYPE:	Nosler	PRIMER TYPE	WSR	
CASE HOLDS:	30.8 Gr. WATER	BARREL Length/Make	24" H-S Prec.	
		BARREL Twist	1-8"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
A-2015 Most Accurate Powder Tested	24.5 * MAX.	2694	90%
	23.5	2597	87%
	22.5	2500	83%
H335	26.5 * MAX.	2825	87%
	25.5	2739	84%
	24.5	2653	81%
Norma 202	26.5 * MAX.	2850	98%
	25.5	2743	94%
	24.5	2636	90%
A-2520	27.0 MAX.	2861	90%
	26.0 *	2753	87%
	25.0	2645	84%
Varget	27.0 MAX.	2873	95%
	26.0	2769	91%
	25.0 *	2665	88%
BL-C2	28.0 MAX.	2879	92%
	27.0	2771	89%
	26.0 *	2664	86%
TAC	27.0 MAX.	2888	89%
	26.0 *	2806	86%
	25.0	2724	83%
W748	28.0 * MAX.	2917	95%
	27.0	2821	91%
	26.0	2725	88%
W760	31.5 * MAX.	2947	** 107%
	30.5	2904	** 104%
	29.5	2861	100%
CFE 223	29.5 * MAX.	2954	97%
	28.5	2863	93%
	27.5	2772	90%
RL15	28.5 MAX.	2960	96%
	27.5 *	2877	93%
	26.5	2794	90%
H380	31.0 MAX.	2981	** 106%
	30.0	2880	** 103%
	29.0 *	2779	99%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

* = Most accurate load tested

** = Compressed load