


CARTRIDGE

223 Winchester Super Short Mag - 40 grain

Version 8.0

Nosler

UP FRONT

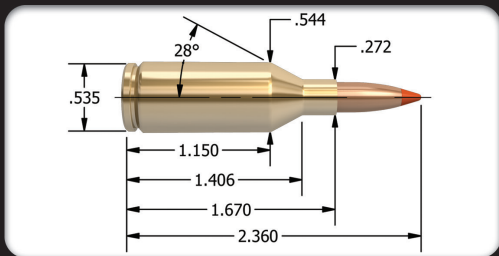

223 WSSM - 40 grain

22 Cal. (.224")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.360"

TESTED O.A.C.L.

B.C.

S.D.

Ballistic Tip®	40gr. Spitzer	2.170"	0.221	0.114
Ballistic Tip® Lead Free	40gr. Spitzer	2.250"	0.220	0.114
Varmageddon®	40gr. FBHP	2.030"	0.158	0.114
Varmageddon®	40gr. FB Tipped	2.130"	0.211	0.114

CASE TYPE:	Winchester	PRIMER TYPE	WLR
CASE HOLDS:	52.5 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-12"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H380 Most Accurate Powder Tested	50.0 MAX.	4251	** 100%
	48.0	4115	96%
	46.0 *	3940	92%
Varget	45.0 * MAX.	4260	93%
	43.0	4092	89%
	41.0	3910	84%
H4895	43.5 MAX.	4280	91%
	41.5 *	4105	87%
	39.5	3920	83%
BL-C2	46.5 MAX.	4294	90%
	44.5	4148	86%
	42.5 *	4023	82%
A-2495	43.5 MAX.	4296	94%
	41.5 *	4140	90%
	39.5	4002	85%
W760	51.0 MAX.	4315	** 102%
	49.0	4171	98%
	47.0 *	4020	94%
Viht N150	46.0 MAX.	4316	** 103%
	44.0 *	4179	99%
	42.0	4081	94%
H414	51.0 MAX.	4323	** 101%
	49.0	4146	97%
	47.0 *	3986	93%
RL15	45.5 MAX.	4350	90%
	43.5	4133	86%
	41.5 *	3963	82%
IMR 4064	46.0 MAX.	4411	96%
	44.0 *	4245	92%
	42.0	4064	88%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

* = Most accurate load tested

** = Compressed load