


# CARTRIDGE

250 Savage - 85 grain

Version 8.0

# Nosler<sup>®</sup>

UP FRONT

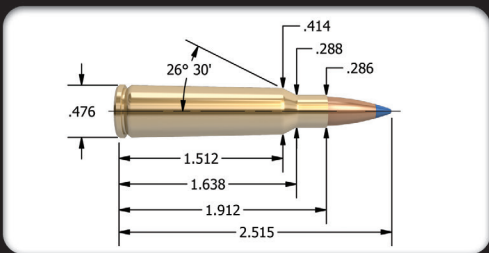

250 Savage - 85 grain

25 Cal. (.257")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.515"

TESTED O.A.C.L.

B.C.

S.D.

Ballistic Tip <sup>®</sup>	85gr. Spitzer	2.515"	0.329	0.183
CT <sup>®</sup> Ballistic Silvertip <sup>®</sup>	85gr. Spitzer	2.515"	0.329	0.183

CASE TYPE:	Winchester	PRIMER TYPE	CCI BR-2	
CASE HOLDS:	42.7 Gr. WATER	BARREL Length/Make	22" Hart	
		BARREL Twist	1-10"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>W760</b>	39.0 * MAX.	2900	96%
	37.0	2790	91%
	35.0	2680	86%
<b>W748</b>	36.0 * MAX.	2932	88%
	34.0	2797	83%
	32.0	2662	78%
<b>A-2520</b>	35.0 MAX.	2980	85%
	33.0	2840	80%
	31.0 *	2700	75%
<b>H414</b>	41.0 * MAX.	3000	100%
	39.0	2860	95%
	37.0	2720	90%
<b>H380</b>	41.0 * MAX.	3002	** 101%
	39.0	2867	96%
	37.0	2732	91%
<b>IMR 4895</b>	35.0 MAX.	3018	90%
	33.0	2853	85%
	31.0 *	2688	80%
<b>RL15</b>	36.0 MAX.	3031	88%
	34.0 *	2847	83%
	32.0	2691	78%
<b>Varget</b> Most Accurate Powder Tested	36.0 MAX.	3036	91%
	34.0	2900	86%
	32.0 *	2700	81%
<b>Viht N150</b>	36.5 * MAX.	3057	** 101%
	34.5	2909	95%
	32.5	2742	90%
<b>Big Game</b>	40.0	3089	99%
	38.0	2950	94%
	36.0 *	2802	89%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load