


# CARTRIDGE

257 Roberts - 100 grain

Version 8.0

# Nosler

UP FRONT

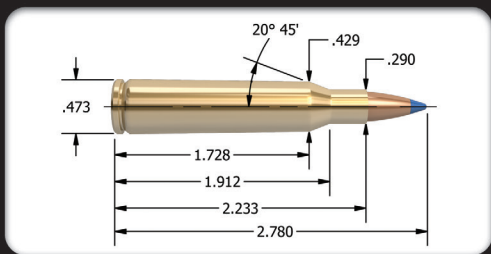

257 Roberts - 100 grain

25 Cal. (.257")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.780"

TESTED O.A.C.L.

B.C.

S.D.

Ballistic Tip®	100gr. Spitzer	2.750"	0.393	0.216
E-Tip®	100gr. Spitzer	2.750"	0.409	0.216
Due to internal construction differences, always begin with starting loads when using E-Tip® products.				
Partition®	100gr. Spitzer	2.750"	0.377	0.216
CASE TYPE:	Winchester	PRIMER TYPE	CCI 200	
CASE HOLDS:	52.2 Gr. WATER	BARREL Length/Make	24" Lilja	
		BARREL Twist	1-10"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>A-2520</b>	37.5 * MAX.	2862	74%
	35.5	2737	70%
	33.5	2612	66%
<b>IMR 4320</b>	37.0 * MAX.	2950	76%
	35.0	2810	72%
	33.0	2670	68%
<b>IMR 4350</b> Most Accurate Powder Tested	43.5 MAX.	3007	88%
	41.5	2913	84%
	39.5 *	2820	80%
<b>H4831SC</b>	48.0 MAX.	3009	96%
	46.0	2922	92%
	44.0 *	2824	88%
<b>Varget</b>	39.0 MAX.	3016	81%
	37.0 *	2904	77%
	35.0	2758	72%
<b>RL19</b>	48.0 MAX.	3052	100%
	46.0	2918	96%
	44.0 *	2827	92%
<b>IMR 4064</b>	38.0 MAX.	3070	80%
	36.0	2940	76%
	34.0 *	2810	72%
<b>H380</b>	40.5 * MAX.	3078	82%
	38.5	2963	78%
	36.5	2848	74%
<b>IMR 4831</b>	45.5 * MAX.	3092	93%
	43.5	2947	89%
	41.5	2802	85%
<b>IMR 4895</b>	37.0 *	3120	78%
	35.0	2970	74%
	33.0	2820	69%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
 \* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load