


# CARTRIDGE

257 Roberts - 110 grain

Version 8.0

# Nosler

UP FRONT

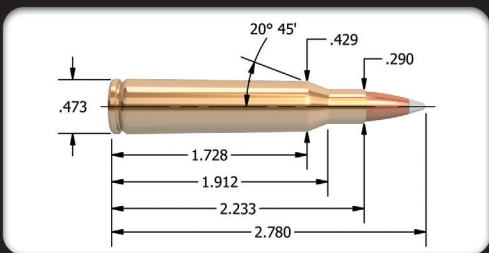

257 Roberts - 110 grain

25 Cal. (.257")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.780"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond®	110gr. Spitzer	2.750"	0.418	0.238
CASE TYPE:	Winchester	PRIMER TYPE	CCI 200	
CASE HOLDS:	51.6 Gr. WATER	BARREL Length/Make	24" Lilja	
		BARREL Twist	1-10"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>H4895</b>	35.5 MAX.	2790	76%
	33.5 *	2670	71%
	31.5	2562	67%
<b>Varget</b>	37.0 MAX.	2821	78%
	35.0 *	2673	73%
	33.0	2546	69%
<b>IMR 4350</b>	43.0 MAX.	2866	88%
	41.0	2762	84%
	39.0 *	2645	80%
<b>H4831SC</b>	46.0 MAX.	2868	93%
	44.0 *	2799	89%
	42.0	2678	85%
<b>H414</b>	41.5 MAX.	2888	84%
	39.5 *	2786	80%
	37.5	2653	76%
<b>RL22</b>	46.0 MAX.	2900	97%
	44.0 *	2750	93%
	42.0	2670	88%
<b>Viht N160</b>	44.0 MAX.	2913	95%
	42.0 *	2842	90%
	40.0	2698	86%
<b>Big Game</b>	42.0 MAX.	2920	86%
	40.0	2802	82%
	38.0 *	2676	78%
<b>RL19</b> Most Accurate Powder Tested	47.0 MAX.	2940	99%
	45.0 *	2819	95%
	43.0	2709	91%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
 \* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load