


CARTRIDGE

270 Weatherby Magnum - 130 grain

Version 8.0

Nosler

UP FRONT

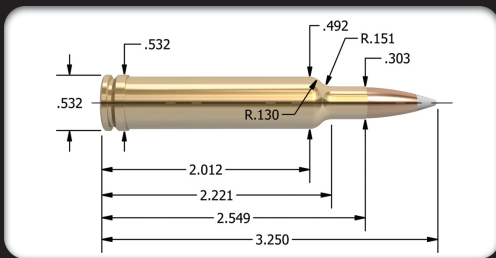

270 Weatherby Magnum - 130 grain 270 Cal. (.277")

MAXIMUM S.A.A.M.I. O.A.C.L. 3.250"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond®	130gr. Spitzer	3.230"	0.435	0.242
Ballistic Tip®	130gr. Spitzer	3.230"	0.433	0.242
CT® Ballistic Silvertip®	130gr. Spitzer	3.230"	0.433	0.242
E-Tip®	130gr. Spitzer	3.230"	0.459	0.242

Due to internal construction differences, always begin with starting loads when using E-Tip® products.

Partition®	130gr. Spitzer	3.230"	0.416	0.242
CASE TYPE:	Nosler	PRIMER TYPE	Fed 215	
CASE HOLDS:	81.7 Gr. WATER	BARREL Length/Make	26" Lilja	
		BARREL Twist	1-10"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4831	69.0 * MAX.	3240	90%
	67.0	3130	87%
	65.0	3020	85%
H4831	72.0 * MAX.	3260	92%
	70.0	3110	89%
	68.0	2960	87%
MAGPRO	76.0 MAX.	3295	96%
	74.0 *	3231	93%
	72.0	3111	91%
Viht N560	71.0 MAX.	3309	97%
	69.0 *	3214	94%
	67.0	3139	91%
IMR 4350	68.0 * MAX.	3350	88%
	66.0	3250	85%
	64.0	3150	83%
RL25	75.0 * MAX.	3350	100%
	73.0	3256	97%
	71.0	3147	94%
RL19 Most Accurate Powder Tested	71.0 * MAX.	3414	94%
	69.0	3318	92%
	67.0	3221	89%
RL22	73.0 * MAX.	3458	97%
	71.0	3386	94%
	69.0	3263	92%
IMR 7828	74.5 * MAX.	3463	97%
	72.5	3402	94%
	70.5	3264	92%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load