


CARTRIDGE

270 Winchester - 110 grain

Version 8.0

Nosler®

UP FRONT

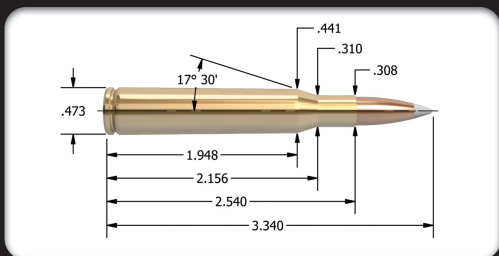

270 Winchester - 110 grain

270 Cal. (.277")

MAXIMUM S.A.A.M.I. O.A.C.L. 3.340"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond®	110gr. Spitzer	3.275"	0.370	0.205
CASE TYPE:	Nosler	PRIMER TYPE	WLR	
CASE HOLDS:	64.6 Gr. WATER	BARREL Length/Make	24" Shilen	
		BARREL Twist	1-10"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H4895	48.0 MAX.	3280	82%
	46.0 *	3170	78%
	44.0	3082	75%
Viht N150	50.0 MAX.	3312	91%
	48.0 *	3209	87%
	46.0	3115	84%
H380	53.0 MAX.	3345	86%
	51.0 *	3254	83%
	49.0	3177	80%
Varget	50.5 MAX.	3371	85%
	48.5 *	3252	81%
	46.5	3155	78%
IMR 4320	50.5 MAX.	3376	84%
	48.5	3248	81%
	46.5 *	3157	77%
RL15	51.0 MAX.	3380	82%
	49.0 *	3262	79%
	47.0	3159	76%
IMR 4064 Most Accurate Powder Tested	51.0 MAX.	3411	87%
	49.0 *	3261	83%
	47.0	3157	80%
IMR 4350	57.0 * MAX.	3437	93%
	55.0	3321	90%
	53.0	3175	87%
W760	56.0 MAX.	3470	91%
	54.0	3371	88%
	52.0 *	3216	84%
Norma 204	57.0 MAX.	3503	98%
	55.0 *	3350	95%
	53.0	3225	91%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

* = Most accurate load tested
 ** = Compressed load