


# CARTRIDGE

270 Winchester - 130 grain

Version 8.0

# Nosler®

UP FRONT

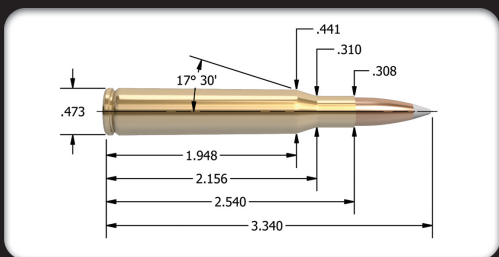

270 Winchester - 130 grain

270 Cal. (.277")

MAXIMUM S.A.A.M.I. O.A.C.L. 3.340"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond®	130gr. Spitzer	3.320"	0.435	0.242
Ballistic Tip®	130gr. Spitzer	3.320"	0.433	0.242
CT® Ballistic Silvertip®	130gr. Spitzer	3.320"	0.433	0.242
E-Tip®	130gr. Spitzer	3.300"	0.459	0.242

Due to internal construction differences, always begin with starting loads when using E-Tip® products.

Partition®	130gr. Spitzer	3.320"	0.416	0.242
CASE TYPE:	Nosler	PRIMER TYPE	Fed 210	
CASE HOLDS:	64.6 Gr. WATER	BARREL Length/Make	24" Shilen	
		BARREL Twist	1-10"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>IMR 4320</b>	47.0 MAX.	2928	78%
	45.0	2833	75%
	43.0 *	2738	72%
<b>H380</b>	50.0 MAX.	2932	81%
	48.0	2847	78%
	46.0 *	2762	75%
<b>IMR 4895</b>	46.0 * MAX.	2960	78%
	44.0	2870	75%
	42.0	2780	71%
<b>H414</b>	54.5 * MAX.	3062	88%
	52.5	2937	85%
	50.5	2812	81%
<b>IMR 4350</b>	55.0 * MAX.	3078	90%
	53.0	2953	87%
	51.0	2828	84%
<b>Hunter</b>	57.5 MAX.	3093	94%
	55.5	2981	90%
	53.5 *	2892	87%
<b>RL22</b>	58.0 * MAX.	3100	98%
	56.0	2950	94%
	54.0	2800	91%
<b>Viht N160</b>	55.0 MAX.	3102	95%
	53.0	3004	91%
	51.0 *	2907	88%
<b>H4831SC</b> Most Accurate Powder Tested	59.0 MAX.	3124	95%
	57.0	2997	92%
	55.0 *	2909	89%
<b>W760</b>	54.0 * MAX.	3158	88%
	52.0	3050	84%
	50.0	2946	81%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
 \* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

\* = Most accurate load tested

\*\* = Compressed load