


# CARTRIDGE

270 Winchester - 140 grain

Version 8.0

# Nosler®

UP FRONT

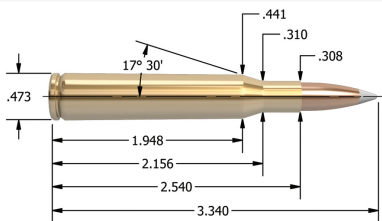

270 Winchester - 140 grain

270 Cal. (.277")

MAXIMUM S.A.A.M.I. O.A.C.L. 3.340"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond®	140gr. Spitzer	3.320"	0.496	0.261
Ballistic Tip®	140gr. Spitzer	3.320"	0.456	0.261
Partition®	140gr. Spitzer	3.320"	0.432	0.261

CASE TYPE:	Nosler	PRIMER TYPE	Fed 210
CASE HOLDS:	63.7 Gr. WATER	BARREL Length/Make	24" Shilen
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>RL15</b>	47.0 * MAX.	2832	77%
	45.0	2727	74%
	43.0	2622	70%
<b>H414</b>	51.5 MAX.	2838	84%
	49.5	2693	81%
	47.5 *	2548	78%
<b>IMR 4350</b>	52.5 MAX.	2858	87%
	50.5	2723	84%
	48.5 *	2588	81%
<b>IMR 4831</b> Most Accurate Powder Tested	53.5 MAX.	2910	89%
	51.5	2790	86%
	49.5 *	2670	83%
<b>Hunter</b>	56.5 MAX.	2971	93%
	54.5	2888	90%
	52.5 *	2782	87%
<b>IMR 7828</b>	57.5 MAX.	2977	96%
	55.5	2870	93%
	53.5 *	2763	89%
<b>H4831SC</b>	58.0 * MAX.	3000	95%
	56.0	2883	92%
	54.0	2774	88%
<b>RL19</b>	55.0 MAX.	3003	94%
	53.0	2891	90%
	51.0 *	2779	87%
<b>W760</b>	53.0 * MAX.	3018	87%
	51.0	2932	84%
	49.0	2835	81%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
 \* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

\* = Most accurate load tested

\*\* = Compressed load