


CARTRIDGE

270 Winchester - 160 grain

Version 8.0

Nosler[®]

UP FRONT

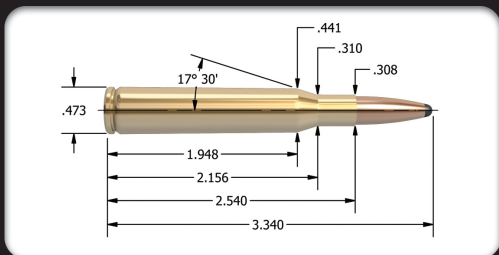

270 Winchester - 160 grain

270 Cal. (.277")

MAXIMUM S.A.A.M.I. O.A.C.L. 3.340"

TESTED O.A.C.L.

B.C.

S.D.

Partition [®]	160gr. Semi Spitzer	3.320"	0.434	0.298
------------------------	---------------------	--------	-------	-------

CASE TYPE:	Nosler	PRIMER TYPE	Fed 210
------------	--------	-------------	---------

CASE HOLDS:	63.8	Gr. WATER	BARREL Length/Make	24" Shilen
-------------	------	-----------	--------------------	------------

		BARREL Twist	1-10"
--	--	--------------	-------

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H4350	51.5 * MAX.	2672	85%
	49.5	2557	82%
	47.5	2442	79%
IMR 7828	57.0 * MAX.	2732	95%
	55.0	2637	92%
	53.0	2542	88%
RL19 Most Accurate Powder Tested	53.5 * MAX.	2750	91%
	51.5	2620	88%
	49.5	2490	84%
IMR 4350	51.0 MAX.	2758	85%
	49.0	2643	81%
	47.0 *	2528	78%
Viht N165	52.0 MAX.	2760	91%
	50.0	2688	87%
	48.0 *	2615	84%
H4831SC	54.5 * MAX.	2777	89%
	52.5	2678	86%
	50.5	2593	82%
MAGPRO	60.0 MAX.	2794	97%
	58.0	2672	94%
	56.0 *	2578	90%
IMR 4831	52.0 * MAX.	2820	87%
	50.0	2722	83%
	48.0	2624	80%
RL22	56.0 * MAX.	2828	95%
	54.0	2703	92%
	52.0	2578	89%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

* = Most accurate load tested

** = Compressed load