


CARTRIDGE

270 Winchester Short Magnum - 130 grain

Version 8.0

Nosler®

UP FRONT

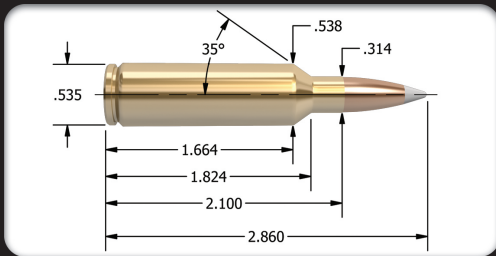

270 WSM - 130 grain

270 Cal. (.277")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.860"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond®	130gr. Spitzer	2.850"	0.435	0.242
Ballistic Tip®	130gr. Spitzer	2.850"	0.433	0.242
CT® Ballistic Silvertip®	130gr. Spitzer	2.850"	0.433	0.242
E-Tip®	130gr. Spitzer	2.820"	0.459	0.242

Due to internal construction differences, always begin with starting loads when using E-Tip® products.

Partition®	130gr. Spitzer	2.850"	0.416	0.242
CASE TYPE:	Winchester	PRIMER TYPE	WLRM	
CASE HOLDS:	73.0 Gr. WATER	BARREL Length/Make	24" Wiseman	
		BARREL Twist	1-10" 4 groove	

POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H4831SC	66.5 MAX.	3239		95%
	64.5	3149		92%
	62.5 *	3065		89%
W760	59.0 * MAX.	3255		85%
	57.0	3203		82%
	55.0	3128		79%
IMR 4350 Most Accurate Powder Tested	63.0 MAX.	3294		91%
	61.0	3141		88%
	59.0 *	3051		86%
RL19	65.5 MAX.	3307		98%
	63.5 *	3167		95%
	61.5	3056		92%
Magnum	73.0 MAX.	3308		** 102%
	71.0	3242		99%
	69.0 *	3159		96%
IMR 4831	61.0 MAX.	3330		89%
	59.0	3234		86%
	57.0 *	3112		83%
IMR 7828	65.5 MAX.	3385		95%
	63.5	3293		93%
	61.5 *	3171		90%
MAGPRO	72.0 MAX.	3389		** 102%
	70.0 *	3317		99%
	68.0	3240		96%
RL22	65.0 MAX.	3396		97%
	63.0 *	3301		94%
	61.0	3222		91%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load