


CARTRIDGE

270 Winchester Short Magnum - 140 grain

Version 8.0

Nosler®

UP FRONT

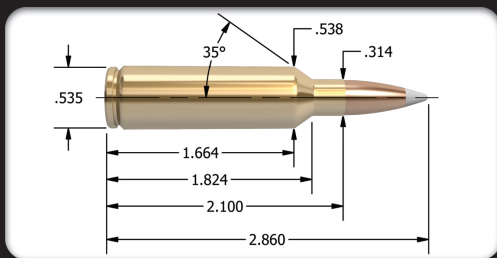

270 WSM - 140 grain

270 Cal. (.277")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.860"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond®	140gr. Spitzer	2.850"	0.496	0.261
Ballistic Tip®	140gr. Spitzer	2.850"	0.456	0.261
Partition®	140gr. Spitzer	2.850"	0.432	0.261

CASE TYPE:	Winchester	PRIMER TYPE	WLRM
CASE HOLDS:	72.4 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-10" 4 groove

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H4831SC	62.5 MAX.	3108	90%
	60.5	3038	87%
	58.5 *	2949	84%
IMR 4350	60.5 MAX.	3154	88%
	58.5 *	3049	86%
	56.5	2938	83%
IMR 7828	61.0 * MAX.	3161	90%
	59.0	3047	87%
	57.0	2950	84%
H1000	65.0 * MAX.	3165	94%
	63.0	3086	91%
	61.0	3025	88%
RL22	61.0 MAX.	3182	92%
	59.0 *	3102	89%
	57.0	3012	86%
RL19	63.5 MAX.	3186	95%
	61.5	3114	92%
	59.5 *	3022	89%
Magnum	71.0 MAX.	3200	100%
	69.0	3116	97%
	67.0 *	3026	94%
Viht N170	67.0 MAX.	3209	** 103%
	65.0 *	3117	100%
	63.0	3074	97%
MAGPRO Most Accurate Powder Tested	69.5 MAX.	3237	99%
	67.5 *	3181	96%
	65.5	3092	93%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

* = Most accurate load tested

** = Compressed load