


CARTRIDGE

270 Winchester Short Magnum - 160 grain

Version 8.0

Nosler®

UP FRONT

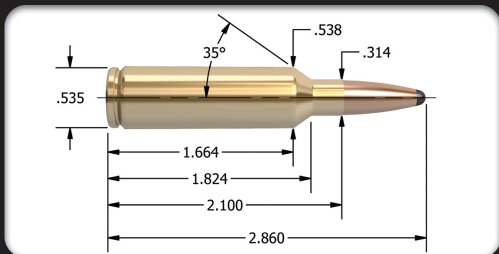

270 WSM - 160 grain

270 Cal. (.277")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.860"

TESTED O.A.C.L.

B.C.

S.D.

Partition®	160gr. Semi Spitzer	2.850"	0.434	0.298
------------	---------------------	--------	-------	-------

CASE TYPE:	Winchester	PRIMER TYPE	WLRM	
CASE HOLDS:	72.9 Gr. WATER	BARREL Length/Make	24" Wiseman	
		BARREL Twist	1-10" 4 groove	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4350	57.0 MAX.	2893	83%
	55.0 *	2816	80%
	53.0	2726	77%
H4831SC	60.0 MAX.	2927	86%
	58.0	2859	83%
	56.0 *	2779	80%
H1000	63.0 * MAX.	2964	90%
	61.0	2863	88%
	59.0	2785	85%
Magnum	67.0 MAX.	2972	93%
	65.0	2876	91%
	63.0 *	2784	88%
RL19 Most Accurate Powder Tested	60.5 * MAX.	2975	90%
	58.5	2905	87%
	56.5	2786	84%
IMR 7828	61.5 MAX.	3040	90%
	59.5	2968	87%
	57.5 *	2859	84%
MAGPRO	67.5 MAX.	3081	95%
	65.5	3011	93%
	63.5 *	2934	90%
RL22	61.5 MAX.	3085	92%
	59.5 *	2993	89%
	57.5	2884	86%
Viht N170	68.0 MAX.	3107	** 104%
	66.0	3019	** 101%
	64.0 *	2926	98%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

* = Most accurate load tested

** = Compressed load