


CARTRIDGE

28 Nosler - 120 grain

Version 8.0

Nosler

UP FRONT

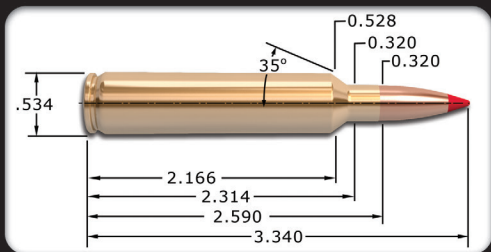

28 Nosler - 120 grain

7mm (.284")

MAXIMUM S.A.A.M.I. O.A.C.L. 3.340"

TESTED O.A.C.L.

B.C.

S.D.

Ballistic Tip®	120gr. Spitzer	3.340"	0.417	0.213
CASE TYPE:	Nosler	PRIMER TYPE	WLRM	
CASE HOLDS:	95.9 Gr. WATER	BARREL Length/Make	26" Pac-Nor	
		BARREL Twist	1-9"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 7977	88.0 MAX.	3621	95%
	86.0 *	3502	92%
	84.0	3377	90%
H1000	89.0 * MAX.	3630	97%
	87.0	3510	95%
	85.0	3380	93%
RL22	85.0 MAX.	3650	96%
	83.0	3583	94%
	81.0 *	3455	92%
Retumbo Most Accurate Powder Tested	92.0 MAX.	3653	** 101%
	90.0 *	3569	99%
	88.0	3481	97%
IMR 7828 SSC	85.0 * MAX.	3680	91%
	83.0	3597	89%
	81.0	3499	87%
RL26	87.0 MAX.	3710	99%
	85.0 *	3560	96%
	83.0	3406	94%
US869	103.0 MAX.	3710	** 117%
	101.0	3634	** 114%
	99.0 *	3570	** 112%
Magnum	92.0 * MAX.	3712	97%
	90.0	3640	95%
	88.0	3568	93%
Viht N165	87.0 MAX.	3713	** 101%
	85.0 *	3600	98%
	83.0	3480	96%
Norma 217	93.0 MAX.	3715	** 109%
	91.0 *	3620	** 107%
	89.0	3522	** 104%
RL25	90.0 * MAX.	3768	** 102%
	88.0	3633	100%
	86.0	3498	97%
Norma MRP	86.0 MAX.	3801	99%
	84.0 *	3703	96%
	82.0	3610	94%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load