


CARTRIDGE

28 Nosler - 140 grain

Version 8.0

Nosler

UP FRONT

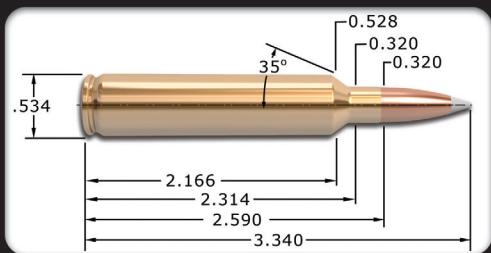

28 Nosler - 140 grain

7mm (.284")

MAXIMUM S.A.A.M.I. O.A.C.L. 3.340"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond®	140gr. Spitzer	3.340"	0.485	0.248
Ballistic Tip®	140gr. Spitzer	3.340"	0.485	0.248
CT®Ballistic Silvertip®	140gr. Spitzer	3.340"	0.485	0.248
E-Tip®	140gr. Spitzer	3.340"	0.489	0.248
Due to internal construction differences, always begin with starting loads when using E-Tip® products.				
Partition®	140gr. Spitzer	3.340"	0.434	0.248
CASE TYPE:	Nosler	PRIMER TYPE	WLRM	
CASE HOLDS:	94.5 Gr. WATER	BARREL Length/Make	26" Pac-Nor	
		BARREL Twist	1-9"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
Viht N165	82.0 * MAX.	3373	96%
	80.0	3244	94%
	78.0	3115	92%
IMR 7977	85.0 MAX.	3436	93%
	83.0 *	3333	91%
	81.0	3225	88%
H1000	86.0 MAX.	3442	95%
	84.0 *	3370	93%
	82.0	3289	91%
Magnum	88.0 * MAX.	3445	95%
	86.0	3381	92%
	84.0	3316	90%
US869	98.0 MAX.	3461	** 113%
	96.0 *	3384	** 110%
	94.0	3307	** 108%
IMR 7828 SSC	81.0 MAX.	3471	88%
	79.0 *	3354	86%
	77.0	3229	84%
RL25	86.0 * MAX.	3491	99%
	84.0	3381	97%
	82.0	3265	94%
RL26	84.0 MAX.	3493	97%
	82.0 *	3418	94%
	80.0	3343	92%
Norma 217 Most Accurate Powder Tested	89.0 MAX.	3510	** 106%
	87.0 *	3380	** 103%
	85.0	3249	** 101%
Retumbo	88.0 MAX.	3519	98%
	86.0 *	3401	96%
	84.0	3285	94%
RL33	97.0 MAX.	3551	** 105%
	95.0 *	3495	** 103%
	93.0	3439	** 100%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load