


CARTRIDGE

28 Nosler - 160 grain

Version 8.0

Nosler®

UP FRONT

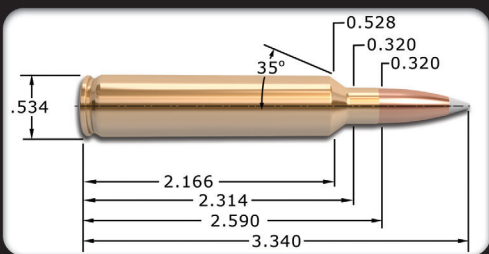

28 Nosler - 160 grain

7mm (.284")

MAXIMUM S.A.A.M.I. O.A.C.L. 3.340"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond®	160gr. Spitzer	3.340"	0.531	0.283
Partition®	160gr. Spitzer	3.340"	0.475	0.283

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	92.5 Gr. WATER	BARREL Length/Make	26" Pac-Nor
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
RL50	93.0 * MAX.	3170	** 106%
	91.0	3103	** 104%
	89.0	3025	** 101%
H50BMG	94.0 MAX.	3201	** 105%
	92.0 *	3135	** 103%
	90.0	3069	** 101%
IMR 7977	81.0 * MAX.	3231	90%
	79.0	3128	88%
	77.0	3039	86%
RL26	79.0 MAX.	3232	93%
	77.0 *	3114	90%
	75.0	2996	88%
H1000	81.0 * MAX.	3240	92%
	79.0	3141	89%
	77.0	3070	87%
RL25	80.0 * MAX.	3269	94%
	78.0	3195	92%
	76.0	3121	89%
Retumbo	84.0 * MAX.	3280	96%
	82.0	3177	93%
	80.0	3104	91%
US869	93.0 MAX.	3285	** 109%
	91.0 *	3212	** 107%
	89.0	3139	** 105%
Norma 217 Most Accurate Powder Tested	85.0 * MAX.	3290	** 103%
	83.0	3191	** 101%
	81.0	3092	98%
RL33	90.0 * MAX.	3293	99%
	88.0	3210	97%
	86.0	3127	95%
Magnum	85.0 * MAX.	3293	93%
	83.0	3246	91%
	81.0	3199	89%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load