


# CARTRIDGE

**30-30 Winchester - 170 grain**

**Version 8.0**

# Nosler

UP FRONT

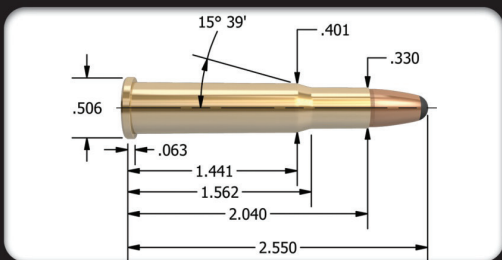

**30-30 Winchester - 170 grain**

**30 Cal. (.308")**

**MAXIMUM S.A.A.M.I. O.A.C.L. 2.550"**

**TESTED O.A.C.L.**

**B.C.**

**S.D.**

Partition®	170gr. RN	2.550"	0.252	0.256
CASE TYPE:	Winchester	PRIMER TYPE	WLR	
CASE HOLDS:	34.6 Gr. WATER	BARREL Length/Make	20" Wiseman	
		BARREL Twist	1-12"	

POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>RL15</b>	31.5 MAX.	1974	[Bar]	95%
	29.5	1847	[Bar]	89%
	27.5 *	1691	[Bar]	83%
<b>A-2520</b>	32.5 MAX.	1984	[Bar]	** 107%
	30.5 *	1899	[Bar]	100%
	28.5	1784	[Bar]	94%
<b>Benchmark</b>	28.0 MAX.	2000	[Bar]	87%
	26.0 *	1872	[Bar]	81%
	24.0	1750	[Bar]	75%
<b>TAC</b>	30.0 MAX.	2031	[Bar]	88%
	28.0 *	1970	[Bar]	83%
	26.0	1890	[Bar]	77%
<b>H414</b>	37.0 * MAX.	2062	[Bar]	** 111%
	35.0	1947	[Bar]	** 105%
	33.0	1832	[Bar]	99%
<b>W748</b>	34.0 MAX.	2071	[Bar]	** 102%
	32.0 *	1938	[Bar]	96%
	30.0	1837	[Bar]	90%
<b>IMR 4895</b>	31.0 * MAX.	2160	[Bar]	98%
	29.0	2030	[Bar]	92%
	27.0	1900	[Bar]	86%
<b>Varget</b> Most Accurate Powder Tested	32.5 MAX.	2162	[Bar]	** 102%
	30.5	1954	[Bar]	95%
	28.5 *	1743	[Bar]	89%
<b>IMR 3031</b>	30.0 MAX.	2168	[Bar]	98%
	28.0	1953	[Bar]	91%
	26.0 *	1738	[Bar]	85%
<b>IMR 4320</b>	33.0 MAX.	2192	[Bar]	** 103%
	31.0	2017	[Bar]	96%
	29.0 *	1842	[Bar]	90%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load