


CARTRIDGE

308 Norma Magnum - 150/155 grain

Version 8.0

Nosler®

UP FRONT

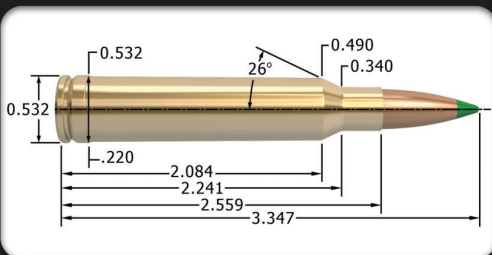

308 Norma Magnum - 150/155 grain 30 Cal. (.308")

MAXIMUM O.A.C.L. 3.347"

B.C. S.D.

| | | | |
|--|----------------|-------|-------|
| AccuBond® | 150gr. Spitzer | 0.435 | 0.226 |
| Ballistic Tip® | 150gr. Spitzer | 0.435 | 0.226 |
| CT® Ballistic Silvertip® | 150gr. Spitzer | 0.435 | 0.226 |
| E-Tip® | 150gr. Spitzer | 0.469 | 0.226 |
| Due to internal construction differences, always begin with starting loads when using E-Tip® products. | | | |
| Partition® | 150gr. Spitzer | 0.387 | 0.226 |
| Custom Competition® | 155gr. HPBT | 0.450 | 0.233 |

| | | | |
|-------------|----------------|--------------------|-------------|
| CASE TYPE: | Norma | PRIMER TYPE | Fed 215 |
| CASE HOLDS: | 81.0 Gr. WATER | BARREL Length/Make | 24" Wiseman |
| | | BARREL Twist | 1-10" |

| POWDER TYPE | POWDER CHG. GRS. | MUZZLE VEL. F.P.S. | LOAD DENSITY (VOLUME) | |
|------------------|------------------|--------------------|-----------------------|-----|
| H414 | 69.0 MAX. | 3040 | 89% | |
| | 67.0 | 2950 | 86% | |
| | 65.0 * | 2860 | 84% | |
| Viht N150 | 62.0 MAX. | 3119 | 90% | |
| | 60.0 | 3049 | 87% | |
| | 58.0 * | 2987 | 84% | |
| IMR 4895 | 60.0 MAX. | 3170 | 81% | |
| | 58.0 | 3020 | 79% | |
| | 56.0 * | 2870 | 76% | |
| RL15 | 63.0 * MAX. | 3206 | 81% | |
| | 61.0 | 3127 | 78% | |
| | 59.0 | 3048 | 76% | |
| IMR 4831 | 74.0 * MAX. | 3208 | 97% | |
| | 72.0 | 3103 | 95% | |
| | 70.0 | 2998 | 92% | |
| IMR 4064 | 62.0 MAX. | 3210 | 84% | |
| | 60.0 | 3090 | 81% | |
| | 58.0 * | 2970 | 79% | |
| IMR 4350 | 72.0 * MAX. | 3232 | 94% | |
| | Most Accurate | 70.0 | 3107 | 91% |
| | Powder Tested | 68.0 | 2982 | 89% |

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load