


CARTRIDGE

375 H&H Magnum - 260 grain

Version 8.0

Nosler®

UP FRONT

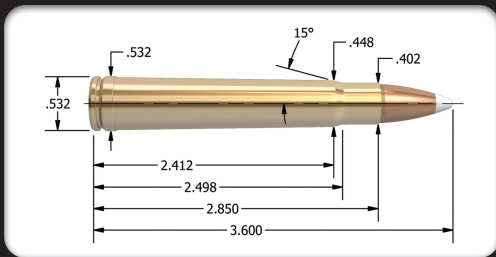

375 H&H Magnum - 260 grain

375 Cal. (.375")

MAXIMUM S.A.A.M.I. O.A.C.L. 3.600"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond®	260gr. Spitzer	3.575"	0.473	0.264
Partition®	260gr. Spitzer	3.495"	0.314	0.264
Solid™	260gr. Solid	3.590"	0.254	0.264

CASE TYPE:	Nosler	PRIMER TYPE	Rem. 9 1/2M
CASE HOLDS:	83.4 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-12"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
RL19	80.0 * MAX.	2604	** 104%
	78.0	2537	** 102%
	76.0	2470	99%
Viht N160	81.0 * MAX.	2681	** 108%
	79.0	2621	** 105%
	77.0	2561	** 103%
IMR 4350	78.5 MAX.	2707	100%
	76.5	2639	97%
	74.5 *	2570	95%
IMR 4064	70.0 MAX.	2721	92%
	68.0	2617	90%
	66.0 *	2512	87%
IMR 4831	80.5 MAX.	2734	** 103%
	78.5	2669	100%
	76.5 *	2605	98%
W760	78.5 MAX.	2747	99%
	76.5	2690	96%
	74.5 *	2633	94%
RL15 Most Accurate Powder Tested	73.0 MAX.	2793	91%
	71.0	2721	89%
	69.0 *	2648	86%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load