


CARTRIDGE

375 H&H Magnum - 300 grain

Version 8.0

Nosler®

UP FRONT

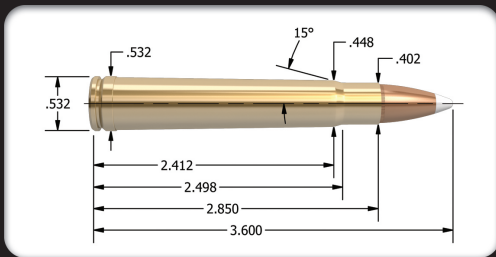

375 H&H Magnum - 300 grain

375 Cal. (.375")

MAXIMUM S.A.A.M.I. O.A.C.L. 3.600"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond®	300gr. Spitzer	3.575"	0.485	0.305
Partition®	300gr. Spitzer	3.550"	0.398	0.305
Solid™	300gr. Solid	3.570"	0.300	0.305

CASE TYPE:	Nosler	PRIMER TYPE	Rem. 9 1/2M
CASE HOLDS:	78.5 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-12"

POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.		LOAD DENSITY (VOLUME)
IMR 4350	75.0 MAX.	2452		**	101%
	73.0	2367			98%
	71.0 *	2282			96%
Viht N160	78.5 * MAX.	2462		**	111%
	76.5	2406		**	108%
	74.5	2350		**	105%
RL19 Most Accurate Powder Tested	79.0 * MAX.	2470		**	109%
	77.0	2410		**	107%
	75.0	2350		**	104%
RL15	68.0 MAX.	2490			90%
	66.0	2425			88%
	64.0 *	2361			85%
IMR 4831	78.0 MAX.	2513		**	106%
	76.0	2402		**	103%
	74.0 *	2300			100%
H4895	67.5 MAX.	2532			94%
	65.5	2466			92%
	63.5 *	2392			89%
W760	78.0 * MAX.	2600		**	104%
	76.0	2564		**	101%
	74.0	2517			99%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load