


CARTRIDGE

6.5 Remington Magnum - 123/125 grain

Version 8.0

Nosler

UP FRONT

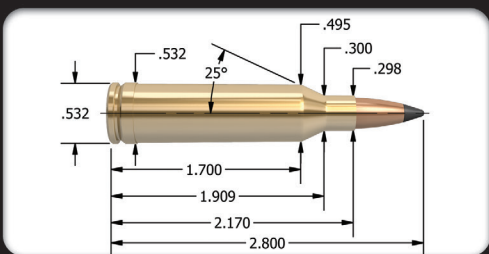

6.5 Remington Magnum - 123/125 grain 6.5mm (.264")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.800" TESTED O.A.C.L. B.C. S.D.

Custom Competition®	123gr. HPBT	2.800"	0.510	0.252
Partition®	125gr. Spitzer	2.800"	0.449	0.256
CASE TYPE:	Remington	PRIMER TYPE	Rem 9 1/2M	
CASE HOLDS:	62.8 Gr. WATER	BARREL Length/Make	24" Pac-Nor	
		BARREL Twist	1-9"	

POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
W760	54.5 MAX.	3161		91%
	52.5	3053		88%
	50.5 *	2955		84%
H4831SC Most Accurate Powder Tested	58.5 MAX.	3165		97%
	56.5	3082		94%
	54.5 *	2983		90%
Hunter	56.5 MAX.	3177		95%
	54.5	3063		91%
	52.5 *	2962		88%
IMR 4350	55.0 MAX.	3180		93%
	53.0	3074		89%
	51.0 *	2980		86%
IMR 4831	57.0 MAX.	3217		97%
	55.0	3120		93%
	53.0 *	3020		90%
MAGPRO	65.5 MAX.	3220		** 108%
	63.5 *	3139		** 104%
	61.5	3063		** 101%
RL19	59.0 MAX.	3260		** 102%
	57.0 *	3176		99%
	55.0	3075		95%
IMR 7828	61.5 MAX.	3266		** 104%
	59.5	3188		** 101%
	57.5 *	3080		97%
RL22	61.0	3273		** 106%
	59.0 *	3170		** 102%
	57.0	3082		99%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load