


CARTRIDGE

7.62x51 NATO - 140 grain

Version 8.0

Nosler

UP FRONT

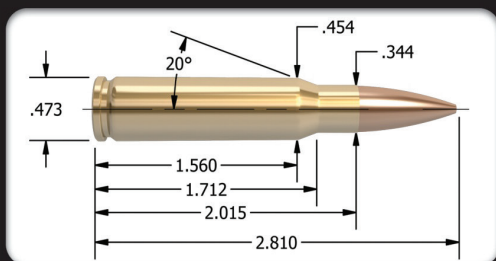

7.62x51 NATO - 140 grain

30 Cal. (.308")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.810"

TESTED O.A.C.L.

B.C.

S.D.

Custom Competition®	140gr. HPBT	2.750"	0.396	0.211
CASE TYPE:	Nosler	PRIMER TYPE	WLR	
CASE HOLDS:	52.0 Gr. WATER	BARREL Length/Make	24" H-S Prec.	
		BARREL Twist	1-12"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
Varget	46.5 MAX.	2865	97%
	44.5 *	2759	93%
	42.5	2632	88%
A-2495 Most Accurate Powder Tested	45.0 * MAX.	2883	98%
	43.0	2771	94%
	41.0	2632	90%
AR-Comp	43.5 * MAX.	2898	95%
	41.5	2753	91%
	39.5	2625	86%
TAC	44.0 MAX.	2900	86%
	42.0	2782	82%
	40.0 *	2669	78%
W748	48.0 MAX.	2923	96%
	46.0	2810	92%
	44.0 *	2719	88%
IMR 8208 XBR	46.5 * MAX.	2924	98%
	44.5	2847	94%
	42.5	2746	90%
IMR 4895	46.5 MAX.	2927	98%
	44.5 *	2852	94%
	42.5	2718	90%
RL15	48.0 * MAX.	2968	96%
	46.0	2850	92%
	44.0	2724	88%
A-2520	47.0 * MAX.	2974	93%
	45.0	2863	89%
	43.0	2748	85%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load