


CARTRIDGE

7.62x51 NATO - 155 grain

Version 8.0

Nosler

UP FRONT

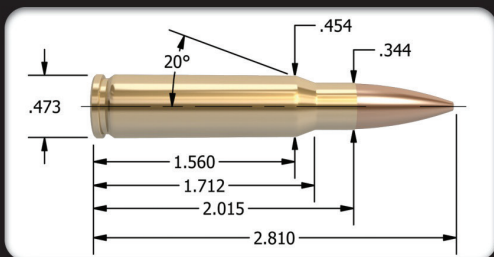

7.62x51 NATO - 155 grain

30 Cal. (.308")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.810"

TESTED O.A.C.L.

B.C.

S.D.

Custom Competition®	155gr. HPBT	2.800"	0.450	0.233
CASE TYPE:	Nosler	PRIMER TYPE	WLR	
CASE HOLDS:	49.5 Gr. WATER	BARREL Length/Make	24" H-S Prec.	
		BARREL Twist	1-12"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
RL15	45.0 MAX.	2700	95%
	43.0 *	2577	90%
	41.0	2431	86%
A-2495	43.0 MAX.	2754	99%
	41.0	2605	94%
	39.0 *	2458	90%
AR-Comp	43.0 MAX.	2768	99%
	41.0 *	2643	94%
	39.0	2520	90%
Varget Most Accurate Powder Tested	45.0 MAX.	2775	98%
	43.0	2644	94%
	41.0 *	2513	90%
IMR 4064	44.5 MAX.	2782	99%
	42.5	2613	94%
	40.5 *	2437	90%
H4895	43.5 MAX.	2789	97%
	41.5	2693	92%
	39.5 *	2607	88%
A-2520	44.5 MAX.	2789	93%
	42.5 *	2680	89%
	40.5	2574	84%
W748	46.0 MAX.	2799	97%
	44.0	2668	93%
	42.0 *	2533	88%
2000-MR	49.0 * MAX.	2829	100%
	47.0	2710	96%
	45.0	2598	92%
CFE 223	49.0 MAX.	2900	100%
	47.0	2763	96%
	45.0 *	2639	92%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

* = Most accurate load tested

** = Compressed load