


# CARTRIDGE

7.62x51 NATO - 175 grain

Version 8.0

# Nosler

UP FRONT

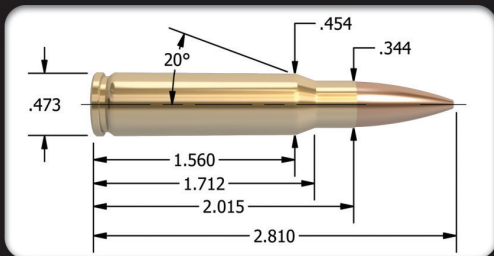

7.62x51 NATO - 175 grain

30 Cal. (.308")

**MAXIMUM S.A.A.M.I. O.A.C.L. 2.810"**

TESTED O.A.C.L.

B.C.

S.D.

Custom Competition®	175gr. HPBT	2.800"	0.505	0.264
---------------------	-------------	--------	-------	-------

CASE TYPE:	Nosler	PRIMER TYPE	WLR
CASE HOLDS:	48.6 Gr. WATER	BARREL Length/Make	24" H-S Prec.
		BARREL Twist	1-12"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>TAC</b>	40.5 MAX.	2510	85%
	38.5	2467	81%
	36.5 *	2378	77%
<b>A-2520</b>	41.5 MAX.	2548	88%
	39.5	2449	84%
	37.5 *	2370	80%
<b>H4895</b>	40.5 MAX.	2554	92%
	38.5	2472	87%
	36.5 *	2368	83%
<b>IMR 4064</b>	41.0 MAX.	2561	93%
	39.0 *	2425	88%
	37.0	2224	84%
<b>RL15</b>	43.0 MAX.	2562	92%
	41.0	2451	88%
	39.0 *	2376	84%
<b>Varget</b>	42.5 MAX.	2564	95%
	40.5	2463	90%
	38.5 *	2298	86%
<b>W760</b>	46.0 MAX.	2565	99%
	44.0	2447	95%
	42.0 *	2348	90%
<b>IMR 8208 XBR</b> Most Accurate Powder Tested	41.0 MAX.	2570	93%
	39.0	2458	88%
	37.0 *	2353	84%
<b>AR-Comp</b>	40.0 * MAX.	2591	94%
	38.0	2422	89%
	36.0	2305	84%
<b>W748</b>	41.5 MAX.	2593	89%
	39.5	2450	85%
	37.5 *	2281	80%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
 \* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load