


CARTRIDGE

7.62x51 NATO - 190 grain

Version 8.0

Nosler

UP FRONT

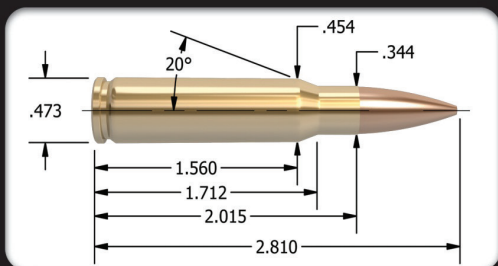

7.62x51 NATO - 190 grain

30 Cal. (.308")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.810"

TESTED O.A.C.L.

B.C.

S.D.

Custom Competition®	190gr. HPBT	2.800"	0.530	0.286
---------------------	-------------	--------	-------	-------

CASE TYPE:	Nosler	PRIMER TYPE	WLR	
------------	--------	-------------	-----	--

CASE HOLDS:	47.0	Gr. WATER	BARREL Length/Make	24" H-S Prec.
-------------	------	-----------	--------------------	---------------

			BARREL Twist	1-12"
--	--	--	--------------	-------

POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.		LOAD DENSITY (VOLUME)
AR-Comp Most Accurate Powder Tested	38.5 MAX.	2408			93%
	36.5	2281			88%
	34.5 *	2172			83%
H335	39.5 MAX.	2410			85%
	37.5 *	2283			81%
	35.5	2225			77%
IMR 4064	40.5 * MAX.	2460			95%
	38.5	2338			90%
	36.5	2209			85%
A-2520	40.5 * MAX.	2482			89%
	38.5	2383			84%
	36.5	2311			80%
IMR 4895	41.0 * MAX.	2491			96%
	39.0	2394			91%
	37.0	2282			87%
W760	45.5 MAX.	2507		**	101%
	43.5 *	2403			97%
	41.5	2250			92%
IMR 4007 SSC	45.5 * MAX.	2520		**	104%
	43.5	2387			99%
	41.5	2276			95%
Varget	42.5 MAX.	2532			98%
	40.5	2426			93%
	38.5 *	2323			89%
2000-MR	45.0 MAX.	2548			97%
	43.0	2435			92%
	41.0 *	2331			88%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

* = Most accurate load tested
 ** = Compressed load