


CARTRIDGE

22-250 Remington - 85 grain (Fast Twist)

Version 8.3

Nosler®

UP FRONT

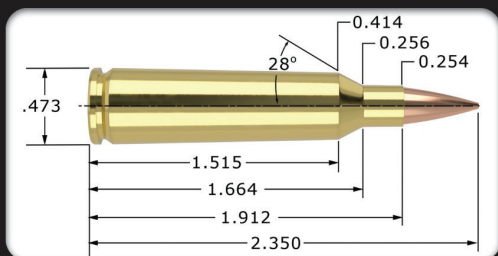

22-250 Remington - 85 grain (Fast Twist) 22 Cal. (.224")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.350"

TESTED O.A.C.L.

B.C.

S.D.

Reduced Drag Factor™	85gr. HPBT	2.450"	0.498	0.242
CASE TYPE:	Nosler	PRIMER TYPE	WLR	
CASE HOLDS:	40.1 Gr. WATER	BARREL Length/Make	24" Wiseman	
		BARREL Twist	1-8"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
Viht N160	36.0 MAX.	2896	100%
	34.0 *	2770	94%
	32.0	2644	89%
RL22	38.0 MAX.	2972	** 103%
	36.0	2837	98%
	34.0 *	2700	92%
H4831SC	39.0 MAX.	2987	** 101%
	37.0	2866	96%
	35.0 *	2736	91%
RL19 Most Accurate Powder Tested	39.0 MAX.	3029	** 106%
	37.0 *	2885	100%
	35.0	2723	95%
W760	37.0 MAX.	3042	97%
	35.0 *	2881	91%
	33.0	2706	86%
H414	36.5 MAX.	3054	95%
	34.5	2873	90%
	32.5 *	2705	84%
IMR 4350	37.0 MAX.	3055	99%
	35.0 *	2920	93%
	33.0	2776	88%
IMR 4831	37.5 MAX.	3108	100%
	35.5 *	2977	95%
	33.5	2815	89%
H4350	37.0 * MAX.	3129	98%
	35.0	3029	92%
	33.0	2903	87%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

* = Most accurate load tested

** = Compressed load