


# CARTRIDGE

22 Nosler 50/52/53 grain

Version 8.3

# Nosler®

UP FRONT

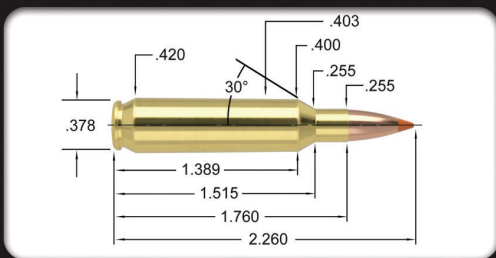

22 Nosler 50/52/53 grain

22 Cal. (.224")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.260"

TESTED O.A.C.L.

B.C.

S.D.

Ballistic Tip®	50gr. Spitzer	2.260"	0.238	0.142
Ballistic Tip® Lead Free	50gr. Spitzer	2.260"	0.251	0.142
CT® Ballistic Silvertip®	50gr. Spitzer	2.260"	0.238	0.142
Nosler®	50gr. FBHP	2.230"	0.192	0.142
Nosler®	50gr. FBSP	2.200"	0.195	0.142
Custom Competition®	52gr. HPBT	2.260"	0.220	0.148
Varmageddon®	53gr. FB Tipped	2.260"	0.303	0.152

CASE TYPE:	Nosler	PRIMER TYPE	WSR
CASE HOLDS:	33.7 Gr. WATER	BARREL Length/Make	24" H-S Prec.
		BARREL Twist	1-8"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>A-2015</b>	27.5 * MAX.	3324	93%
	26.5	3228	89%
	25.5	3132	86%
<b>RL10x</b>	26.0 * MAX.	3377	87%
	25.0	3288	83%
	24.0	3199	80%
<b>Norma 202</b> Most Accurate Powder Tested	29.5 * MAX.	3435	99%
	28.5	3315	96%
	27.5	3195	93%
<b>IMR 4166</b>	30.0 MAX.	3457	98%
	29.0 *	3301	95%
	28.0	3145	91%
<b>Benchmark</b>	29.5 MAX.	3485	95%
	28.5 *	3384	91%
	27.5	3283	88%
<b>TAC</b>	31.0 MAX.	3529	94%
	30.0 *	3403	91%
	29.0	3277	88%
<b>W748</b>	32.5 MAX.	3583	100%
	31.5 *	3494	97%
	30.5	3405	94%
<b>H4895</b>	30.0 MAX.	3593	98%
	29.0 *	3420	95%
	28.0	3247	91%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
 \* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

\* = Most accurate load tested

\*\* = Compressed load