


CARTRIDGE

223 Remington 50/52/53 grain

Version 8.3

Nosler

UP FRONT

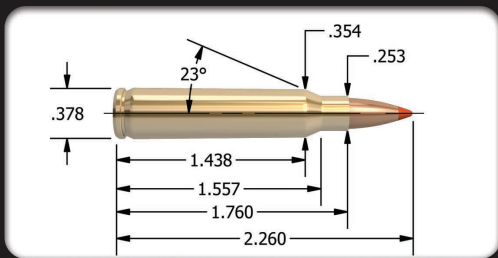

223 Remington 50/52/53 grain

22 Cal. (.224")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.260"

TESTED O.A.C.L.

B.C.

S.D.

Ballistic Tip®	50gr. Spitzer	2.260"	0.238	0.142
Ballistic Tip® Lead Free	50gr. Spitzer	2.260"	0.251	0.142
CT® Ballistic Silvertip®	50gr. Spitzer	2.260"	0.238	0.142
Nosler®	50gr. FBHP	2.230"	0.192	0.142
Nosler®	50gr. FBSP	2.200"	0.195	0.142
Custom Competition®	52gr. HPBT	2.260"	0.220	0.148
Varmageddon®	53gr. FB Tipped	2.260"	0.303	0.152

CASE TYPE:	Nosler	PRIMER TYPE	Rem 7 1/2
CASE HOLDS:	27.5 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-12"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
Varget	26.0 * MAX.	3220	** 102%
	25.0	3092	98%
	24.0	2963	94%
IMR 4198	22.0 * MAX.	3230	91%
	21.0	3110	87%
	20.0	2990	83%
H335	26.0 MAX.	3260	96%
	25.0	3170	92%
	24.0 *	3080	89%
W748	26.5 * MAX.	3260	100%
	25.5	3150	97%
	24.5	3040	93%
Varmint	27.0 MAX.	3262	99%
	26.0	3119	96%
	25.0 *	2977	92%
CFE 223	29.0 MAX.	3379	** 107%
	28.0	3233	** 103%
	27.0 *	3088	99%
TAC	27.0 MAX.	3393	100%
	26.0	3238	96%
	25.0 *	3170	93%
Viht N133	25.0 MAX.	3412	** 106%
	24.0	3301	** 101%
	23.0 *	3190	97%
A-2460	28.0 MAX.	3497	** 103%
	27.0	3391	99%
	26.0 *	3285	96%
Benchmark	26.5 MAX.	3540	** 104%
	Most Accurate Powder Tested 25.5 *	3411	100%
	24.5	3285	96%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load