


CARTRIDGE

270 Winchester Short Magnum - 150 grain

Version 8.3

Nosler[®]

UP FRONT

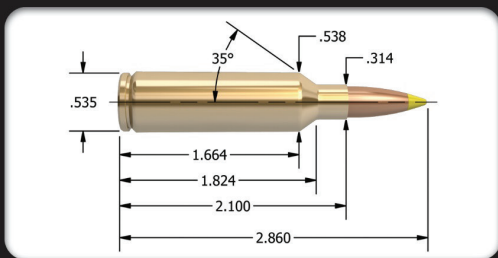

270 WSM - 150 grain

270 Cal. (.277")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.860"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond [®] Long Range	150gr. Spitzer	2.850"	0.591	0.279
Ballistic Tip [®]	150gr. Spitzer	2.850"	0.496	0.279
CT [®] Ballistic Silvertip [®]	150gr. Spitzer	2.850"	0.496	0.279
Partition [®]	150gr. Spitzer	2.850"	0.465	0.279

CASE TYPE:	Winchester	PRIMER TYPE	WLRM
CASE HOLDS:	71.8 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-10" 4 groove

POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H4831SC Most Accurate Powder Tested	60.0 MAX.	2966	[Bar]	87%
	58.0	2886	[Bar]	84%
	56.0 *	2803	[Bar]	81%
IMR 4350	58.0 * MAX.	2992	[Bar]	85%
	56.0	2894	[Bar]	83%
	54.0	2813	[Bar]	80%
RL19	60.5 MAX.	3007	[Bar]	92%
	58.5 *	2916	[Bar]	89%
	56.5	2834	[Bar]	86%
H1000	63.5 * MAX.	3068	[Bar]	93%
	61.5	3003	[Bar]	90%
	59.5	2903	[Bar]	87%
Magnum	69.0 MAX.	3089	[Bar]	98%
	67.0 *	2989	[Bar]	95%
	65.0	2888	[Bar]	92%
IMR 7828	61.5 MAX.	3117	[Bar]	91%
	59.5 *	3024	[Bar]	88%
	57.5	2949	[Bar]	85%
Viht N170	67.0 * MAX.	3147	[Bar]	** 104%
	65.0	3076	[Bar]	** 101%
	63.0	3006	[Bar]	97%
RL22	61.0 MAX.	3155	[Bar]	92%
	59.0	3069	[Bar]	89%
	57.0 *	2965	[Bar]	86%
MAGPRO	68.0 MAX.	3187	[Bar]	98%
	66.0 *	3122	[Bar]	95%
	64.0	3022	[Bar]	92%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load