


# CARTRIDGE

## 270 Weatherby Magnum - 150 grain

Version 8.3

# Nosler®

UP FRONT

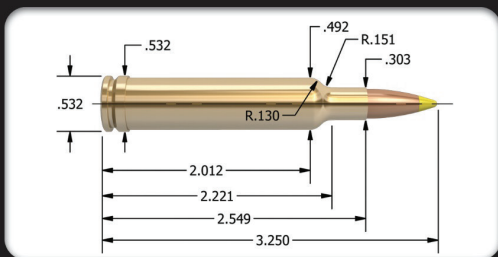

## 270 Weatherby Magnum - 150 grain 270 Cal. (.277")

**MAXIMUM S.A.A.M.I. O.A.C.L. 3.250"**

**TESTED O.A.C.L.**

**B.C.**

**S.D.**

AccuBond® Long Range	150gr. Spitzer	3.220"	0.591	0.279
Ballistic Tip®	150gr. Spitzer	3.230"	0.496	0.279
CT® Ballistic Silvertip®	150gr. Spitzer	3.230"	0.496	0.279
Partition®	150gr. Spitzer	3.230"	0.465	0.279

CASE TYPE:	Nosler	PRIMER TYPE	Fed 215
CASE HOLDS:	79.4 Gr. WATER	BARREL Length/Make	26" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>RL22</b>	66.5 MAX.	2988	91%
	64.5	2901	88%
	62.5 *	2815	86%
<b>MAGPRO</b>	70.0 MAX.	3031	91%
	68.0 *	2913	88%
	66.0	2812	86%
<b>IMR 4831</b>	67.0 * MAX.	3060	90%
	65.0	2950	87%
	63.0	2840	84%
<b>IMR 4350</b>	65.0 * MAX.	3060	87%
	63.0	2990	84%
	61.0	2920	81%
<b>H4831</b>	69.0 MAX.	3068	91%
	67.0	2943	88%
	65.0 *	2818	85%
<b>Retumbo</b>	75.0 MAX.	3091	99%
	73.0 *	3039	97%
	71.0	2965	94%
<b>RL25</b> Most Accurate Powder Tested	72.0 * MAX.	3109	99%
	70.0	3040	96%
	68.0	2924	93%
<b>Viht N560</b>	69.5 * MAX.	3190	97%
	67.5	3103	94%
	65.5	2998	92%
<b>IMR 7828</b>	70.5 MAX.	3207	94%
	68.5	3118	92%
	66.5 *	3033	89%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load