


CARTRIDGE

28 Nosler - 168 grain

Version 8.3

Nosler®

UP FRONT

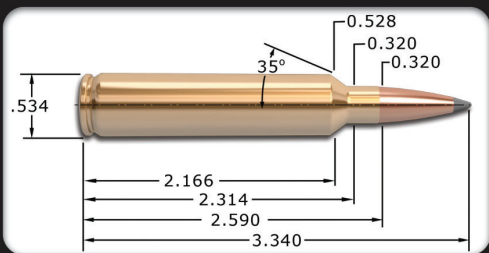

28 Nosler - 168 grain

7mm (.284")

MAXIMUM S.A.A.M.I. O.A.C.L. 3.340"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond® Long Range	168gr. Spitzer	3.340"	0.616	0.298
Custom Competition®	168gr. HPBT	3.340"	0.520	0.298

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	91.0 Gr. WATER	BARREL Length/Make	26" Pac-Nor
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
Magnum	83.0 * MAX.	3054	93%
	81.0	2980	90%
	79.0	2900	88%
H50BMG	92.0 * MAX.	3131	** 105%
	90.0	3100	** 102%
	88.0	3069	100%
RL25	79.0 * MAX.	3160	94%
	77.0	3086	92%
	75.0	3011	90%
IMR 7977	80.0 MAX.	3164	91%
	78.0 *	3078	88%
	76.0	2992	86%
RL26	78.0 * MAX.	3177	93%
	76.0	3083	91%
	74.0	2985	88%
H1000	80.0 MAX.	3183	92%
	78.0 *	3111	90%
	76.0	3029	87%
Norma 217	84.0 MAX.	3191	** 104%
	82.0 *	3084	** 101%
	80.0	2977	99%
US869 Most Accurate Powder Tested	93.0 MAX.	3228	** 111%
	91.0 *	3135	** 109%
	89.0	3042	** 106%
Retumbo	83.0 MAX.	3228	96%
	81.0 *	3140	94%
	79.0	3052	91%
RL33	89.0 * MAX.	3238	100%
	87.0	3138	98%
	85.0	3035	95%
RL50	92.0 * MAX.	3251	** 106%
	90.0	3190	** 104%
	88.0	3124	** 102%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load