


CARTRIDGE

280 Ackley Improved - 150 grain

Version 8.3

Nosler®

UP FRONT

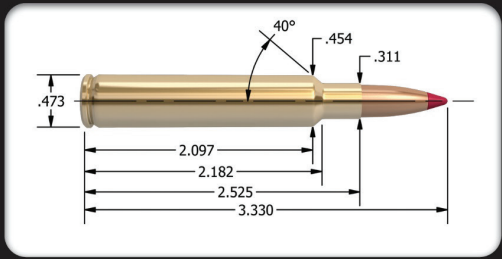

280 Ackley Improved - 150 grain

7mm (.284")

MAXIMUM S.A.A.M.I. O.A.C.L. 3.330"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond® Long Range	150gr. Spitzer	3.330"	0.546	0.266
Ballistic Tip®	150gr. Spitzer	3.330"	0.493	0.266
CT® Ballistic Silvertip®	150gr. Spitzer	3.330"	0.493	0.266
E-Tip®	150gr. Spitzer	3.300"	0.498	0.266
Due to internal construction differences, always begin with starting loads when using E-Tip® products.				
Partition®	150gr. Spitzer	3.330"	0.456	0.266
CASE TYPE:	Nosler	PRIMER TYPE	Fed 210	
CASE HOLDS:	64.8 Gr. WATER	BARREL Length/Make	26" Wiseman	
		BARREL Twist	1-9"	

POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
Norma MRP	57.0 MAX.	2856		97%
	55.0 *	2736		93%
	53.0	2616		90%
Hunter	57.5 * MAX.	2928		93%
	55.5	2870		90%
	53.5	2812		87%
4000-MR	57.0 * MAX.	2984		93%
	55.0	2887		89%
	53.0	2790		86%
H4831SC Most Accurate Powder Tested	60.5 * MAX.	2994		97%
	58.5	2889		94%
	56.5	2776		91%
RL17	55.0 MAX.	3014		88%
	53.0	2890		85%
	51.0 *	2796		81%
IMR 4350	56.5 MAX.	3014		92%
	54.5 *	2912		89%
	52.5	2794		86%
Viht N165	63.0 * MAX.	3055		** 108%
	61.0	2956		** 105%
	59.0	2857		** 101%
RL22	61.5 MAX.	3095		** 103%
	59.5	2988		100%
	57.5 *	2880		96%
IMR 7828	63.0 MAX.	3107		** 103%
	61.0	3015		100%
	59.0 *	2923		97%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load