


CARTRIDGE

30-06 Springfield - 190 grain

Version 8.3

Nosler®

UP FRONT

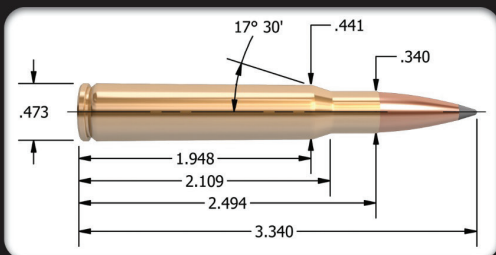

30-06 Springfield - 190 grain

30 Cal. (.308")

MAXIMUM S.A.A.M.I. O.A.C.L. 3.340"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond® Long Range	190gr. Spitzer	3.340"	0.597	0.286
Custom Competition®	190gr. HPBT	3.330"	0.530	0.286

CASE TYPE:	Nosler	PRIMER TYPE	WLR
CASE HOLDS:	62.7 Gr. WATER	BARREL Length/Make	24" H-S Prec.
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H4831	57.0 MAX.	2613	95%
	55.0	2494	91%
	53.0 *	2370	88%
IMR 4350	53.5 MAX.	2620	90%
	51.5	2520	87%
	49.5 *	2394	84%
Hybrid 100V	52.0 MAX.	2620	85%
	50.0 *	2543	82%
	48.0	2445	79%
4000-MR	55.0 * MAX.	2653	92%
	53.0	2558	89%
	51.0	2433	86%
IMR 7828 SSC	59.5 MAX.	2658	98%
	57.5	2604	95%
	55.5 *	2475	91%
H4350	53.5 MAX.	2661	90%
	51.5 *	2567	87%
	49.5	2468	84%
RL19	56.5 MAX.	2668	98%
	54.5 *	2558	94%
	52.5	2428	91%
W760	53.5 MAX.	2683	89%
	51.5 *	2566	86%
	49.5	2434	83%
Supreme 780	59.5 MAX.	2697	99%
	57.5 *	2589	96%
	55.5	2507	93%
RL22	60.0 * MAX.	2712	** 104%
	58.0	2648	** 101%
	56.0	2581	97%
RL17	54.5 MAX.	2748	90%
	52.5	2629	87%
	50.5 *	2510	83%
Viht N560	61.0 * MAX.	2749	** 108%
	59.0	2658	** 105%
	57.0	2567	** 101%
Norma MRP	58.5 MAX.	2769	** 103%
	56.5 *	2662	99%
	54.5	2551	96%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

* = Most accurate load tested

** = Compressed load