


CARTRIDGE

300 Rem Short Action Ultra Mag - 190 Grain

Version 8.3

Nosler

UP FRONT

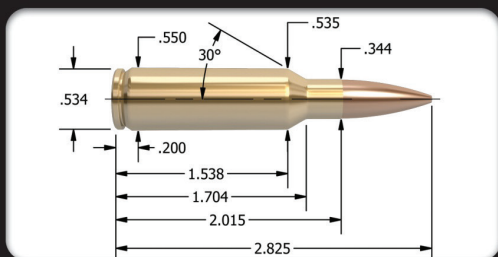

300 Rem S.A. Ultra Mag - 190 grain

30 Cal. (.308")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.825"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond® Long Range	190gr. Spitzer	2.825"	0.597	0.286
Custom Competition®	190gr. HPBT	2.825"	0.530	0.286

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	65.0 Gr. WATER	BARREL Length/Make	24" H-S Prec.
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
MAGPRO	70.0 MAX.	2849		** 111%
	68.0	2784		** 108%
	66.0 *	2673		** 105%
IMR 7828 SSC	65.5 * MAX.	2852		** 104%
	63.5	2780		** 101%
	61.5	2705		98%
W760	60.0 MAX.	2858		97%
	58.0	2787		93%
	56.0 *	2709		90%
Hunter	64.0 MAX.	2876		** 104%
	62.0 *	2794		100%
	60.0	2730		97%
H414	60.0 MAX.	2876		96%
	58.0	2798		93%
	56.0 *	2719		90%
H4831 Most Accurate Powder Tested	66.0 MAX.	2878		** 106%
	64.0 *	2809		** 103%
	62.0	2750		99%
Hybrid 100V	60.0 MAX.	2890		95%
	58.0	2804		92%
	56.0 *	2676		89%
Norma 204	60.5 MAX.	2892		** 103%
	58.5	2780		100%
	56.5 *	2677		97%
RL19	64.0 MAX.	2898		** 107%
	62.0	2827		** 104%
	60.0 *	2720		100%
RL17	58.0 MAX.	2908		92%
	56.0 *	2781		89%
	54.0	2654		86%
IMR 4350	60.5 MAX.	2911		98%
	58.5	2802		95%
	56.5 *	2737		92%
Viht N560	65.5 MAX.	2914		** 112%
	63.5 *	2830		** 109%
	61.5	2741		** 105%
RL22	66.0 MAX.	2925		** 110%
	64.0	2853		** 107%
	62.0 *	2729		** 104%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load