


# CARTRIDGE

## 300 Rem Short Action Ultra Mag - 210 Grain

Version 8.3

# Nosler®

UP FRONT

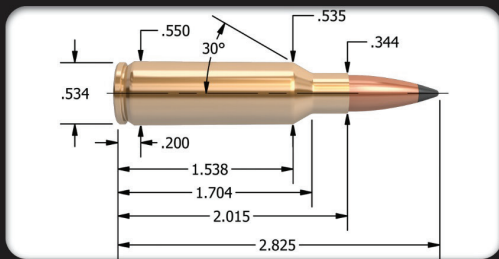

## 300 Rem S.A. Ultra Mag - 210 grain

30 Cal. (.308")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.825"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond® Long Range	210gr. Spitzer	2.825"	0.661	0.316
CASE TYPE:	Nosler	PRIMER TYPE	WLRM	
CASE HOLDS:	64.1 Gr. WATER	BARREL Length/Make	24" Wiseman	
		BARREL Twist	1-10"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>H4831SC</b>	62.0 MAX.	2638	** 101%
	60.0 *	2596	98%
	58.0	2523	94%
<b>IMR 4350</b>	57.0 * MAX.	2687	94%
	55.0	2596	91%
	53.0	2501	87%
<b>RL17</b>	56.0 MAX.	2716	90%
	54.0 *	2620	87%
	52.0	2524	84%
<b>H4350</b>	58.0 MAX.	2731	96%
	56.0	2681	92%
	54.0 *	2597	89%
<b>H414</b>	59.0 MAX.	2749	96%
	57.0 *	2660	93%
	55.0	2559	89%
<b>RL19</b> Most Accurate Powder Tested	63.0 MAX.	2753	** 107%
	61.0 *	2673	** 103%
	59.0	2583	100%
<b>Norma MRP</b>	64.0 * MAX.	2770	** 110%
	62.0	2692	** 106%
	60.0	2614	** 103%
<b>RL22</b>	63.0 MAX.	2783	** 107%
	61.0	2703	** 103%
	59.0 *	2621	100%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load