


# CARTRIDGE

## 300 Winchester Short Magnum - 190 grain

Version 8.3

# Nosler®

UP FRONT

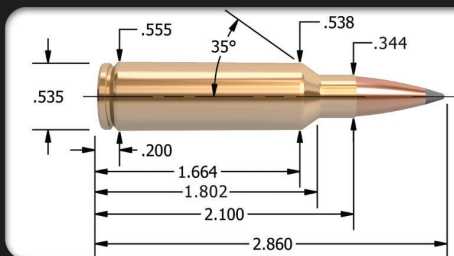

### 300 WSM - 190 grain

### 30 Cal. (.308")

**MAXIMUM S.A.A.M.I. O.A.C.L. 2.860"**

**TESTED O.A.C.L.**

**B.C.**

**S.D.**

AccuBond® Long Range	190gr. Spitzer	2.860	0.597	0.286
Custom Competition®	190gr. HPBT	2.840"	0.530	0.286

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	70.5 Gr. WATER	BARREL Length/Make	24" H-S Prec.
		BARREL Twist	1-10" 4 groove

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>H4831SC</b> Most Accurate Powder Tested	69.0 MAX.	2892	** 102%
	67.0 *	2825	99%
	65.0	2750	96%
<b>W760</b>	62.5 MAX.	2901	93%
	60.5 *	2836	90%
	58.5	2777	87%
<b>H414</b>	63.0 MAX.	2908	94%
	61.0	2830	91%
	59.0 *	2748	88%
<b>Norma 204</b>	62.0 MAX.	2919	98%
	60.0 *	2837	95%
	58.0	2755	91%
<b>Hunter</b>	65.0 MAX.	2921	97%
	63.0 *	2810	94%
	61.0	2699	91%
<b>IMR 7828 SSC</b>	70.0 MAX.	2925	** 102%
	68.0 *	2842	99%
	66.0	2767	97%
<b>Viht N560</b>	69.0 MAX.	2944	** 109%
	67.0	2840	** 106%
	65.0 *	2750	** 102%
<b>RL17</b>	60.0 MAX.	2958	88%
	58.0 *	2860	85%
	56.0	2762	82%
<b>Supreme 780</b>	70.0 MAX.	2958	** 104%
	68.0 *	2903	** 101%
	66.0	2856	98%
<b>MAGPRO</b>	75.0 MAX.	2962	** 110%
	73.0 *	2880	** 107%
	71.0	2797	** 104%
<b>4000-MR</b>	65.0 * MAX.	2967	97%
	63.0	2913	94%
	61.0	2859	91%
<b>Hybrid 100V</b>	63.5 MAX.	2968	93%
	61.5	2875	90%
	59.5 *	2781	87%
<b>Norma MRP</b>	68.0 MAX.	3016	** 106%
	66.0 *	2940	** 103%
	64.0	2864	100%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load