


CARTRIDGE

6.5 Creedmoor - 129/130 grain

Version 8.3

Nosler

UP FRONT

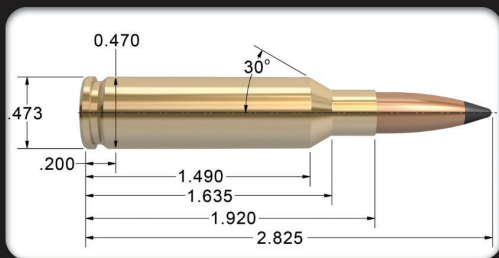

6.5 Creedmoor - 129/130 grain

6.5mm (.264")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.825"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond® Long Range	129gr. Spitzer	2.775"	0.530	0.264
AccuBond®	130gr. Spitzer	2.775"	0.488	0.266
Reduced Drag Factor™	130gr. Spitzer	2.775"	0.615	0.266

CASE TYPE:	Hornady	PRIMER TYPE	Fed. 210
CASE HOLDS:	47.1 Gr. WATER	BARREL Length/Make	24" Pac-Nor
		BARREL Twist	1-8"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
RL15 Most Accurate Powder Tested	39.0 * MAX.	2810	86%
	37.0	2687	82%
	35.0	2581	77%
Varget	38.5 MAX.	2812	88%
	36.5 *	2699	84%
	34.5	2586	79%
W748	39.5 MAX.	2822	87%
	37.5	2693	83%
	35.5 *	2572	79%
Big Game	43.0 * MAX.	2839	96%
	41.0	2741	92%
	39.0	2631	87%
H4350	43.0 MAX.	2865	97%
	41.0 *	2751	92%
	39.0	2639	88%
Hunter	44.0 MAX.	2871	98%
	42.0 *	2737	94%
	40.0	2612	89%
W760	44.0 MAX.	2906	98%
	42.0	2775	93%
	40.0 *	2670	89%
Hybrid 100V	43.5 MAX.	2935	95%
	41.5	2800	91%
	39.5 *	2665	86%
RL17	43.5 MAX.	2953	98%
	41.5	2783	94%
	39.5 *	2660	89%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load