


# CARTRIDGE

## 6.5 Creedmoor - 140/142 grain

Version 8.3

# Nosler

UP FRONT

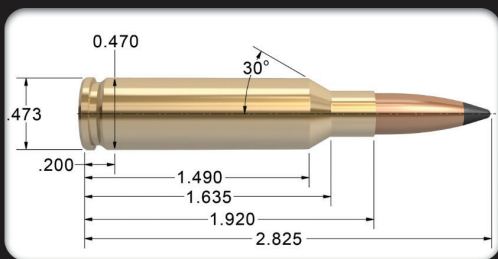

## 6.5 Creedmoor - 140/142 grain

6.5mm (.264")

**MAXIMUM S.A.A.M.I. O.A.C.L. 2.825"**

TESTED O.A.C.L.

B.C.

S.D.

AccuBond®	140gr. Spitzer	2.805"	0.509	0.287
Ballistic Tip®	140gr. Spitzer	2.805"	0.509	0.287
Custom Competition®	140gr. HPBT	2.775"	0.529	0.287
Partition®	140gr. Spitzer	2.790"	0.490	0.287
Reduced Drag Factor™	140gr. HPBT	2.805"	0.658	0.287
AccuBond® Long Range	142gr. Spitzer	2.805"	0.625	0.291

CASE TYPE:	Hornady	PRIMER TYPE	Fed. 210
CASE HOLDS:	46.8 Gr. WATER	BARREL Length/Make	24" Pac-Nor
		BARREL Twist	1-8"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>IMR 8208 XBR</b> Most Accurate Powder Tested	33.5 MAX.	2510	79%
	31.5 *	2392	74%
	29.5	2268	69%
<b>H380</b>	39.0 * MAX.	2605	88%
	37.0	2491	83%
	35.0	2391	79%
<b>IMR 4895</b>	36.0 * MAX.	2620	85%
	34.0	2492	80%
	32.0	2384	75%
<b>RL15</b>	36.5 * MAX.	2635	81%
	34.5	2502	77%
	32.5	2369	72%
<b>Hybrid 100V</b>	40.0 * MAX.	2658	88%
	38.0	2547	84%
	36.0	2435	79%
<b>IMR 4007 SSC</b>	40.0 MAX.	2668	92%
	38.0	2556	87%
	36.0 *	2426	82%
<b>W760</b>	40.5 MAX.	2672	91%
	38.5 *	2543	86%
	36.5	2436	82%
<b>H414</b>	40.5 * MAX.	2673	90%
	38.5	2563	86%
	36.5	2455	81%
<b>H4350</b>	41.0 MAX.	2699	93%
	39.0	2571	88%
	37.0 *	2485	84%
<b>Hunter</b>	44.0 MAX.	2730	99%
	42.0	2603	94%
	40.0 *	2479	90%
<b>IMR 4350</b>	41.5 MAX.	2731	94%
	39.5 *	2598	89%
	37.5	2453	85%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load