


# CARTRIDGE

6.5 Remington Magnum - 129/130 grain

Version 8.3

# Nosler®

UP FRONT

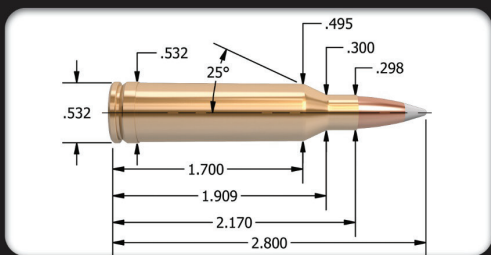

6.5 Remington Mag - 129/130 grain

6.5mm (.264")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.800"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond® Long Range	129gr. Spitzer	2.800"	0.561	0.264
AccuBond®	130gr. Spitzer	2.800"	0.488	0.266
Reduced Drag Factor™	130gr. HPBT	2.800"	0.615	0.266

CASE TYPE:	Remington	PRIMER TYPE	Rem 9 1/2M
CASE HOLDS:	60.1 Gr. WATER	BARREL Length/Make	24" Pac-Nor
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>W760</b>	52.5 MAX.	3007	91%
	50.5 *	2925	88%
	48.5	2849	85%
<b>MAGPRO</b>	63.5 * MAX.	3086	** 109%
	61.5	3005	** 105%
	59.5	2931	** 102%
<b>Hunter</b>	56.5 MAX.	3102	99%
	54.5	3026	95%
	52.5 *	2979	92%
<b>H4831SC</b>	57.5 MAX.	3103	100%
	55.5	3044	96%
	53.5 *	2950	93%
<b>IMR 4350</b>	54.0 MAX.	3104	95%
	52.0	2999	92%
	50.0 *	2882	88%
<b>IMR 4831</b> Most Accurate Powder Tested	56.0 MAX.	3136	99%
	54.0	3057	96%
	52.0 *	2953	92%
<b>RL19</b>	57.5 MAX.	3141	** 104%
	55.5	3040	100%
	53.5 *	2935	97%
<b>RL22</b>	59.5 MAX.	3170	** 108%
	57.5	3095	** 104%
	55.5 *	2999	100%
<b>IMR 7828</b>	60.5	3180	** 107%
	58.5 *	3096	** 104%
	56.5	3015	100%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load