


# CARTRIDGE

6.5 Remington Magnum - 140/142 grain

Version 8.3

# Nosler

UP FRONT

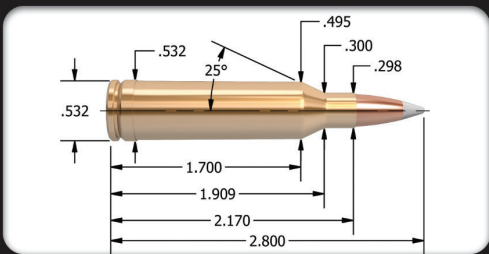

6.5 Remington Mag - 140/142 grain

6.5mm (.264")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.800"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond®	140gr. Spitzer	2.800"	0.509	0.287
Ballistic Tip®	140gr. Spitzer	2.800"	0.509	0.287
Custom Competition®	140gr. HPBT	2.800"	0.529	0.287
Partition®	140gr. Spitzer	2.800"	0.490	0.287
Reduced Drag Factor™	140gr. HPBT	2.800"	0.658	0.287
AccuBond® Long Range*	142gr. Spitzer	2.800"	0.625	0.291

\*1-8" twist recommended for the 142gr AccuBond® Long Range

CASE TYPE:	Remington	PRIMER TYPE	Rem 9 1/2M
CASE HOLDS:	59.3 Gr. WATER	BARREL Length/Make	24" Pac-Nor
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>W760</b>	50.5 MAX.	2900	89%
	48.5 *	2810	86%
	46.5	2725	82%
<b>MAGPRO</b>	60.5 MAX.	2947	** 105%
	58.5	2868	** 102%
	56.5 *	2761	98%
<b>Hunter</b>	55.0 MAX.	2958	98%
	53.0	2906	94%
	51.0 *	2801	91%
<b>IMR 4350</b>	53.0 MAX.	2961	95%
	51.0 *	2874	91%
	49.0	2768	87%
<b>H4831SC</b>	57.0 MAX.	2979	100%
	55.0	2908	97%
	53.0 *	2835	93%
<b>RL19</b> Most Accurate Powder Tested	55.5 MAX.	2997	** 102%
	53.5	2908	98%
	51.5 *	2801	94%
<b>IMR 4831</b>	55.0 MAX.	2997	99%
	53.0 *	2909	95%
	51.0	2833	91%
<b>RL22</b>	57.5 MAX.	3042	** 105%
	55.5 *	2956	** 102%
	53.5	2877	98%
<b>IMR 7828</b>	58.5 MAX.	3059	** 105%
	56.5 *	2983	** 101%
	54.5	2877	98%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load