


CARTRIDGE

7mm Remington Magnum - 150 grain

Version 8.3

Nosler

UP FRONT

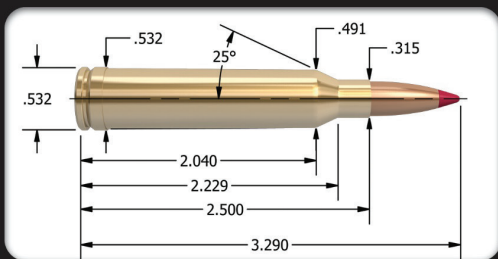

7mm Remington Magnum - 150 grain 7mm (.284")

MAXIMUM S.A.A.M.I. O.A.C.L. 3.290" TESTED O.A.C.L. B.C. S.D.

AccuBond® Long Range	150gr. Spitzer	3.290"	0.546	0.266
Ballistic Tip®	150gr. Spitzer	3.290"	0.493	0.266
CT® Ballistic Silvertip®	150gr. Spitzer	3.290"	0.493	0.266
E-Tip®	150gr. Spitzer	3.260"	0.498	0.266

Due to internal construction differences, always begin with starting loads when using E-Tip® products.

Partition®	150gr. Spitzer	3.290"	0.456	0.266
CASE TYPE:	Nosler	PRIMER TYPE	Fed 215	
CASE HOLDS:	78.0 Gr. WATER	BARREL Length/Make	24" Wiseman	
		BARREL Twist	1-9"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4064	53.0 MAX.	2968	75%
	51.0	2873	72%
	49.0 *	2778	69%
Viht N165	66.0 MAX.	3017	94%
	64.0	2941	91%
	62.0 *	2865	88%
IMR 4320	55.0 MAX.	3048	76%
	53.0	2953	73%
	51.0 *	2858	70%
Viht N160 Most Accurate Powder Tested	64.0 * MAX.	3048	91%
	62.0	2951	88%
	60.0	2869	85%
H4831SC	65.0 MAX.	3075	87%
	63.0	3023	84%
	61.0 *	2956	81%
MAGPRO	72.5 MAX.	3128	96%
	70.5	3067	93%
	68.5 *	3000	91%
IMR 7828	68.0 * MAX.	3162	93%
	66.0	3072	90%
	64.0	2947	87%
IMR 4831	65.0 MAX.	3240	89%
	63.0	3130	86%
	61.0 *	3020	83%
IMR 4350	63.0 * MAX.	3248	85%
	61.0	3138	83%
	59.0	3028	80%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load