


CARTRIDGE

7mm Remington Magnum - 168 grain

Version 8.3

Nosler

UP FRONT

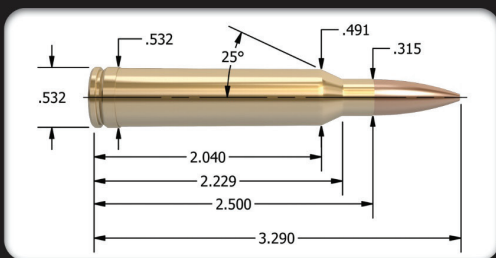

7mm Remington Magnum - 168 grain 7mm (.284")

MAXIMUM S.A.A.M.I. O.A.C.L. 3.290"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond® Long Range	168gr. Spitzer	3.250"	0.616	0.298
Custom Competition®	168gr. HPBT	3.250"	0.520	0.298

CASE TYPE:	Nosler	PRIMER TYPE	Fed 215
CASE HOLDS:	75.0 Gr. WATER	BARREL Length/Make	24" Pac-Nor
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
4000-MR Most Accurate Powder Tested	62.0 MAX.	2880	87%
	60.0	2808	84%
	58.0 *	2731	81%
IMR 4350	62.0 * MAX.	2912	87%
	60.0	2863	85%
	58.0	2810	82%
H4831SC	65.0 * MAX.	2920	90%
	63.0	2862	88%
	61.0	2804	85%
RL22	64.0 * MAX.	2927	93%
	62.0	2827	90%
	60.0	2721	87%
Norma MRP	66.0 * MAX.	2930	97%
	64.0	2881	94%
	62.0	2829	91%
IMR 4831	64.0 MAX.	2945	91%
	62.0 *	2899	88%
	60.0	2850	85%
H1000	70.0 MAX.	2993	98%
	68.0 *	2915	95%
	66.0	2835	92%
Magnum	72.0 MAX.	2999	97%
	70.0	2924	95%
	68.0 *	2856	92%
RL25	70.0 MAX.	3006	** 101%
	68.0 *	2915	99%
	66.0	2820	96%
MAGPRO	71.0 MAX.	3011	99%
	69.0	2938	96%
	67.0 *	2862	94%
Retumbo	73.0 MAX.	3047	** 102%
	71.0 *	2975	100%
	69.0	2903	97%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

* = Most accurate load tested

** = Compressed load