


# CARTRIDGE

24 Nosler - 105 grain

Version 8.0

# Nosler

UP FRONT

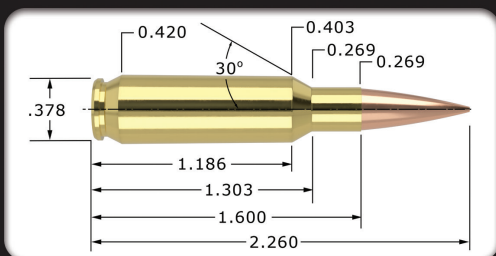

## 24 Nosler - 105 grain

6mm (.243")

**MAXIMUM S.A.A.M.I. O.A.C.L. 2.260"**

**TESTED O.A.C.L.**

**B.C.**

**S.D.**

Custom Competition®	105gr. HPBT	2.250"	0.517	0.254
Reduced Drag Factor™	105gr. HPBT	2.250"	0.571	0.254

CASE TYPE:	Nosler	PRIMER TYPE	WSR	
CASE HOLDS:	25.8 Gr. WATER	BARREL Length/Make	24" H-S Prec.	
		BARREL Twist	1-8"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>IMR 4320</b>	24.0 * MAX.	2403	** 101%
	23.0	2293	97%
	22.0	2183	93%
<b>Norma 202</b>	23.5 * MAX.	2446	** 104%
	22.5	2353	99%
	21.5	2261	95%
<b>IMR 8208 XBR</b>	23.0 MAX.	2457	98%
	22.0 *	2372	94%
	21.0	2287	89%
<b>A-2520</b>	24.0 MAX.	2466	96%
	23.0 *	2367	92%
	22.0	2268	88%
<b>Benchmark</b> Most Accurate Powder Tested	23.0 MAX.	2468	96%
	22.0 *	2363	92%
	21.0	2258	88%
<b>Varget</b>	24.0 MAX.	2468	** 101%
	23.0	2372	96%
	22.0 *	2275	92%
<b>H4895</b>	23.0 MAX.	2473	98%
	22.0 *	2370	94%
	21.0	2268	89%
<b>TAC</b>	24.0 MAX.	2482	94%
	23.0 *	2391	91%
	22.0	2299	87%
<b>H335</b>	24.5 MAX.	2483	96%
	23.5	2386	92%
	22.5 *	2289	89%
<b>BL-C2</b>	25.5 * MAX.	2485	100%
	24.5	2368	96%
	23.5	2251	92%
<b>W748</b>	25.0	2493	** 101%
	24.0 *	2406	97%
	23.0	2319	93%
<b>RL15</b>	25.0 * MAX.	2521	** 101%
	24.0	2429	97%
	23.0	2337	93%
<b>CFE 223</b>	27.0 MAX.	2625	** 105%
	26.0 *	2545	** 101%
	25.0	2465	97%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
 \* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

\* = Most accurate load tested

\*\* = Compressed load